



productsrange
产品范围

Identity, Innovation and ambition are the three pillars that have made Atlas Filtri the crown jewel of our country.

A company who after 40 years of activity in the market of water treatment and filtration still looks at today with the same enthusiasm and determination.

Atlas Filtri has always confirmed itself as a fixed point, in constant motion, able to invent and evolve in order to be competitive and cutting edge. Its new headquarters, right in the heart of Limena (Padova), is the perfect representation of the company's philosophy: a modern plant, spacious, accessible and technological, it is a stage for new negotiations and international expansion. To aim high and access far away markets, Atlas Filtri offers a wide range of products for domestic and industrial use, such as **filter housings, filter cartridges, self-cleaning filters, anti-scale units, portable filters, drinking water filters, RO units, softeners, media filters, U.V. lamp sterilization, water treatment full plants, dosing pumps, chemical products.** Solutions flexible and personalized to specific needs.

同一性，创新和雄心使ATLAS FILTRI得以成为我们国家皇冠明珠的三大支柱。

在水处理和过滤市场中发展了40多年，公司至今对市场的发展仍充满热情和决心。

ATLAS FILTRI一直确认它是一个固定的支点，不断地运动，能够不断创新和发展使其保持竞争力并始终处于前沿。新的总部，位于帕多瓦Limena心脏地带，完美地代表了公司的哲学：一个现代化厂房，非常宽敞，容易进入，拥有新的技术，便于新的谈判和国际业务扩展。为了拓展更高更远的国际市场，ATLAS FILTRI提供家用和工业一系列产品，譬如过滤壳，滤芯，自动清洁过滤器，防水垢装置，便携式过滤器，饮用水过滤器，反渗透设备，软水机，过滤介质，紫外线杀菌灯，水处理整套设备，剂量泵，化学产品。并提供对特殊需求灵活和个性化的方案。

innovation and technology in the Water Filtration Sector.

Made in Italy.

创新和科技 在净水过滤行业 意大利制造

Research and development, process and product innovation are the major strategic issues today for Atlas Filtri. Due to that, the continuous research for new materials, new molding methods and expertise, the implementation of fully robotized lines, anyway open and flexible, the wide range of models and solutions, yet easy to be integrated for specific requests, lead us to offer the maximum for **productivity, reliability, flexibility, brand consolidation, OEM and custom solutions.**

研究和发展，产品和工艺创新是雅德拉斯过滤器有限公司主要的战略方向。基于此，对新材料，新模具工艺方法和专业的持续研发，完全机器人自动化生产线的实施，应特殊要求制定的既开放又灵活的广泛的解决方案和模式，**引领我们提供更具高效产能，可靠性，灵活性，品牌整合，代加工和定制的解决方案。**



COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =
= ISO 14001 =
= OHSAS 18001 =



Atlas Filtri has achieved major Company and Products certifications.
雅德拉斯过滤器有限公司获得了主要的企业和产品认证证书。

ASSOCIATA



ASSOCIAZIONE COSTRUTTORI IMPIANTI E COMPONENTI
PER IL TRATTAMENTO DELLE ACQUE PRIMARIE

FEDERATA



Atlas Filtri is an active member of major world water organizations.
雅德拉斯过滤器有限公司是主要的世界水处理组织的活跃成员。



ATLAS green is the ATLAS FILTRI seal for environmentally friendly products, performed by technologies reducing energy consumption by products with high recyclable rates. For that purpose filter housings bowls are made with PET.

绿色雅德拉斯是雅德拉斯过滤器有限公司环保产品的标志，通过降低产品能源消耗提高回收率的技术来实现。基于此原因，过滤器滤壳滤碗是PET材质。



Atlas Filtri research and technology result also in the production of filter housings and cartridges with Antimicrobial Product Protection.

雅德拉斯过滤器有限公司的研发和科技同时也体现于带有抗菌产品保护功能的过滤器外壳和滤芯的生产。



PLUS 3P

Single, Duplex and Triplex housings for cartridges with standard SX flat seals (DOE) and for specialty cartridges with BX and CX quick-fit double o-ring.



SENIOR TRIPLEX TS

IN/OUT connections: female brass or plastic BSP threads, NPT plastic threads.

- IN/OUT 1/2", 3/4", 1", 1 1/4, 1 1/2"
- HEIGHTS 5", 7", 10", 20"
- Max working pressure:
BSP versions 8 bar (116 psi).
NPT versions 8,6 bar (125 psi).
- Max working temperature: 45°C (113°F)

Accessories on demand: spanner, wall brackets, diffuser tubes, brass and plastic nipples, KIT AUTO (discharge automation kit), Lubrikit.

带标准SX平面密封 (DOE) 滤芯和带BX和CX快速装配双O型密封圈特种滤芯的单, 双座和三座滤壳。

输入/输出连接件: 英制 (BSP) 黄铜或塑料内螺纹, 美制 (NPT) 塑料螺纹。

- 输入/输出: 1/2, 3/4, 1, 1 1/4, 1 1/2"
- 高度: 5, 7, 10, 20"
- 最大工作压力:
BSP 版本 8 bar (116 psi)
NPT 版本 8,6 bar (125 psi)
- 最高工作温度: 45摄氏度 (113华氏度)

需要的配件: 扳手, 墙装托架, 扩散管, 黄铜和塑料接头, KIT AUTO (自动排放组件), Lubrikit (润滑剂套件)。



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002

JUNIOR TS

SENIOR TS MP

SENIOR DUPLEX TS

SENIOR M AB

SENIOR S TS

MASTER TS

PLUS 2P

Single, Duplex and Triplex housings for cartridges with standard SX flat seals (DOE).

IN/OUT connections: female brass or plastic BSP threads, NPT plastic threads.

- IN/OUT 1/2", 3/4", 1"
- HEIGHTS 4", 7", 10"
- Max working pressure: 8 bar (116 psi)
- Max working temperature: 45°C (113°F)

Accessories on demand: spanner, wall brackets, diffuser tubes, brass and plastic nipples, Lubrikit.

带标准SX平面密封 (DOE) 滤芯的单座, 双座和三座滤壳。

输入/输出连接件: 英制 (BSP) 黄铜或塑料内螺纹, 美制 (NPT) 塑料螺纹。

- 输入/输出: 1/2, 3/4, 1"

- 高度: 4, 7, 10"
 - 最大工作压力: 8 巴 (116磅/平方英寸)
 - 最高工作温度: 45摄氏度 (113华氏度)
- 需要的配件: 扳手, 墙装托架, 扩散管, 黄铜和塑料接头, Lubrikit (润滑剂套件)。



SENIOR AS



SENIOR MP AB



SENIOR DUPLEX AS



SENIOR TRIPLEX AS



SENIOR M AB

MIGNON PLUS

Single and Duplex housings for 5" M (OD 50 mm) cartridges with standard SX flat seals (DOE).

IN/OUT connections: female brass BSP threads

- IN/OUT 1/2", 3/4"
- Max working pressure: 8 bar (116 psi)
- Max working temperature: 45°C (113°F)

Accessories on demand: spanner, wall bracket Duplex, diffuser tube, brass and plastic nipples, Lubrikit.

带标准SX平面密封 (DOE) 5" M (外径50毫米) 滤芯的单座和双座滤壳。

输入/输出连接件: 英制 (BSP) 黄铜内螺纹。

- 输入/输出: 1/2, 3/4"
- 最大工作压力: 8 巴 (116磅/平方英寸)
- 最高工作温度: 45摄氏度 (113华氏度)

需要的配件: 扳手, 复式墙装托架, 扩散管, 黄铜和塑料接头, Lubrikit (润滑剂套件)。



MIGNON L 2P AS



MIGNON S 2P AB



MIGNON SL 3P AS

MICRO 3/8

Designed for applications with cleaners, pressure-washers, micro-irrigation.

Dimensions 74x49x66 mm.

Filtration from 100 to 1000 micron.

- IN/OUT 3/8"
- Max working pressure: 7 bar (101 psi)
- Max working temperature: 45°C (113°F)

设计适用于清洁剂, 高压清洗机, 微型灌溉的应用。

尺寸 74x49x66毫米。

过滤从100至1000微米。

- 输入/输出: 3/8"
- 最大工作压力: 7巴 (101磅/平方英寸)
- 最高工作温度: 45摄氏度 (113华氏度)



SANIC

WATER FILTERS WITH
ANTIMICROBIAL
TECHNOLOGY

FILTER HOUSINGS WITH ANTIMICROBIAL TECHNOLOGY

PLUS 3P SANIC

Single, Duplex and Triplex housings with Antimicrobial Product Protection technology, for cartridges with standard SX flat seals (DOE) and for specialty cartridges with BX quick-fit double o-ring. The Antimicrobial protection is performed by a proprietary technology which makes the antimicrobial agent included in the plastic matrix. Stain and odor causing bacteria are not allowed to grow on the housing surfaces, even in still water. Sanic housings in combination with Sanic filter cartridges are the best solution for filtration of drinking water. Patented.

IN/OUT connections: female brass or plastic BSP threads, NPT plastic threads.

- IN/OUT 1/2", 3/4", 1"
- HEIGHTS 5", 7", 10", 20"
- Max working pressure:
BSP versions 8 bar (116 psi).
NPT versions 8,6 bar (125 psi).
- Max working temperature: 45°C (113°F)

Accessories included: spanner, wall brackets.

Accessory on demand: Lubrikit.

带标准SX平面密封 (DOE) 滤芯和带BX快速装配双O型密封圈特种滤芯的单座，双座和三座拥有抗菌产品保护技术的滤壳。

抗菌保护是通过一种专有技术使抗菌剂溶于塑料基质来实现。产生细菌的污渍和气味无法在滤壳表面生成，即使在静水中也无法生成。萨尼科滤壳与萨尼科滤芯组合在一起是饮用水过滤领域的最佳解决方案。获得专利技术。

输入/输出连接件：英制 (BSP) 黄铜或塑料内螺纹，美制 (NPT) 塑料螺纹。

- 输入/输出：1/2, 3/4, 1"
- 高度：5, 7, 10, 20"
- 最大工作压力：
BSP 版本8 bar (116 psi)
NPT 版本 8,6bar (125 psi)
- 最高工作温度：45摄氏度 (113华氏度)

配置的配件：扳手，墙装托架。

需要的配件：Lubrikit (润滑剂套件)。



Powered by Microban® antimicrobial technology

MICROBAN

MICROBAN is a registered trademark of Microban Products Company.



Systems tested and certified by IAPMO RT against NSF/ANSI 42 for bacteriostasis effect. Components tested and certified by IAPMO RT against NSF/ANSI Standards 42 and 61 for material and structural integrity requirements only. In compliance with drinking water regulations, USA and Canada.



MEDIUM

JUNIOR

SENIOR

SENIOR DUPLEX

SENIOR TRIPLEX

FILTER HOUSINGS

PLUS HOT 3P

Single housings for hot water, for cartridges with standard SX flat seals (DOE)) and for specialty cartridges with BX quick-fit double o-ring.

IN/OUT connections: female plastic BSP threads, NPT plastic threads.

- IN/OUT 1/2", 3/4", 1"
- HEIGHTS 5", 7", 10", 20"
- Max working pressure: 8,6 bar (125 psi).
- Max working temperature: 80°C (176°F)

Accessories on demand: spanner, wall bracket, KIT AUTO (discharge automation kit), Lubrikit.

适用于热水，带标准SX平面密封 (DOE) 滤芯和带BX快速装配双O型密封圈特种滤芯的单座滤壳。

输入/输出连接件：英制 (BSP) 黄铜或塑料内螺纹，美制 (NPT) 塑料螺纹。

- 输入/输出：1/2, 3/4, 1"
- 高度：5, 7, 10, 20"
- 最大工作压力：8.6 巴 (125磅/平方英寸)
- 最高工作温度：80摄氏度 (176华氏度)

需要的配件：扳手，墙装托架，KIT AUTO (自动排放组件)，Lubrikit (润滑剂套件)。



Tested and certified by IAPMO RT to NSF/ANSI 42 - Structural Integrity Only and CSA B483.1 - Structural Integrity Only. In compliance with drinking water regulations, USA and Canada.



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002

SENIOR S

FILTER HOUSINGS

PP 3P

Single and Duplex housings for cartridges with standard SX flat seals (DOE).

IN/OUT connections: female plastic BSP threads.

- IN/OUT 1/2", 3/4", 1"
- HEIGHTS 5" M (OD 50 mm), 5", 7", 10", 20"
- Max working pressure:
8 bar (116 psi) with neutral pH
3 bar (43 psi) with non neutral pH
- Max working temperature: 45°C (113°F)

Accessories on demand: spanner, wall brackets, Lubrikit.

带标准SX平面密封 (DOE) 滤芯的单座和双座滤壳。

输入/输出连接件：英制 (BSP) 塑料内螺纹。

- 输入/输出：1/2, 3/4, 1"
- 高度 5" M (外径50毫米)：5, 7, 10, 20"
- 最大工作压力：

- 8 巴 (116磅/平方英寸) 中性PH值
- 3 巴 (43 磅/平方英寸) 非中性PH值
- 最高工作温度：45摄氏度 (113华氏度)

需要的配件：扳手，墙装托架，Lubrikit (润滑剂套件)。



MIGNON

MIGNON DUPLEX

SENIOR

SENIOR DUPLEX

Mono, Duo and Trio housings, patented and registered models. Housings suitable for cartridges with standard SX flat seals (DOE) and for cartridges with BX quick-fit double o-ring.

Housings provided with Filterfit: special centering device for SX cartridges.

IN/OUT connections: female brass or plastic BSP threads, NPT plastic threads.

- IN/OUT 1/4", 3/8", 1/2", 3/4", 1", 1 1/4, 1 1/2
- HEIGHTS 5", 7", 10", 20"
- Max working pressure:
BSP versions 8 bar (116 psi).
NPT versions 8,6 bar (125 psi).
- Max working temperature: 45°C (113°F)

Accessories on demand: spanner, wall brackets, brass and plastic nipples, base (10" models only), KIT AUTO (discharge automation kit), Lubrikit.

单座，双座和三座获得专利和型号注册的滤壳。滤壳适合带标准SX平面密封 (DOE) 的滤芯和带BX快速装配双O型密封圈的滤芯。

滤壳带有过滤器装配接口：适合SX滤芯的特殊中心定位装置。

输入/输出连接件：英制 (BSP) 黄铜或塑料内螺纹，美制 (NPT) 塑料螺纹。

- 输入/输出：1/4, 3/8, 1/2, 3/4, 1, 1 1/4, 1 1/2
- 高度：5, 7, 10, 20"
- 最大工作压力：
BSP 版本 8 bar (116 psi)
NPT 版本 8,6 bar (125 psi)
- 最高工作温度：45摄氏度 (113华氏度)

按需求提供的配件：扳手，墙壁支架，黄铜和塑料螺纹接头，底座 (仅10" 款式)，自动组件 (自动排放组件)，润滑配件。




Tested and certified by IAPMO RT to NSF/ANSI 42, 61, 372 - lead free, CSA B483.1. In compliance with drinking water regulations, USA and Canada.



20" MONO TS

10" S M MONO TS

DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002

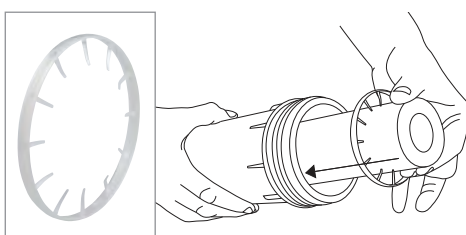

FILTERFIT
Cartridge centering device
滤芯中心定位装置



10" MONO MP AB



10" DUO TS



10" TRIO BW

SANIC

WATER FILTERS WITH
ANTIMICROBIAL
TECHNOLOGY

FILTER HOUSINGS WITH ANTIMICROBIAL TECHNOLOGY

DP SANIC

Mono, Duo and Trio patented and registered housings with Antimicrobial Product Protection technology. Housings suitable for cartridges with standard SX flat seals (DOE) and for cartridges with BX quick-fit double o-ring.

Housings provided with Filterfit: special centering device for SX cartridges. The Antimicrobial protection is performed by a proprietary technology which makes the antimicrobial agent included in the plastic matrix. Stain and odor causing bacteria are not allowed to grow on the housing surfaces, even in still water. Sanic housings in combination with Sanic filter cartridges are the best solution for filtration of drinking water. Patented.

IN/OUT connections: female brass or plastic BSP threads, NPT plastic threads.

- IN/OUT 1/4", 3/8", 1/2", 3/4", 1"

- HEIGHTS 5", 7", 10", 20"

- Max working pressure:

BSP versions 8 bar (116 psi).

NPT versions 8,6 bar (125 psi).

- Max working temperature: 45°C (113°F)

Accessories included: spanner, wall brackets.

Accessory on demand: Lubrikit.

单座，双座和三座获得专利和注册商标并带有抗菌产品保护技术的滤壳。滤壳适合带标准SX平面密封 (DOE) 的滤芯和带BX快速装配双O型密封圈的滤芯。

滤壳带有过滤器装配接口：适合SX滤芯的特殊中心定位装置。抗菌保护是通过一种专有技术使抗菌剂溶于塑料基质来实现。产生细菌的污渍和气味无法在滤壳表面生成，即使在静水中也无法生成。萨尼科滤壳与萨尼科滤芯组合在一起是饮用水过滤领域的最佳解决方案。获得专利技术。

输入/输出连接件：英制 (BSP) 黄铜或塑料内螺纹，美制 (NPT) 塑料螺纹。

- 输入/输出：1/4, 3/8, 1/2, 3/4, 1"

- 高度：5, 7, 10, 20"

- 最大工作压力：

BSP 版本8 bar (116 psi)

NPT 版本 8,6bar (125 psi)

- 最高工作温度：45摄氏度 (113华氏度)

配置的配件：扳手，墙装托架。

需要的配件：Lubrikit (润滑剂套件)。



Powered by Microban® antimicrobial technology

MICROBAN®

MICROBAN is a registered trademark of Microban Products Company.



Systems tested and certified by IAPMO RT against NSF/ANSI 42 for bacteriostasis effect. Components tested and certified by IAPMO RT against NSF/ANSI Standards 42 and 61 for material and structural integrity requirements only. In compliance with drinking water regulations, USA and Canada.



10" MONO

10" DUO

10" TRIO

DP DS

Housings with 360° rotational connection group for easy connection to horizontal or vertical pipes. Suitable for cartridges with standard SX flat seals (DOE) and for cartridges with BX quick-fit double o-ring end-cap.

Housings provided with Filterfit: special centering device for SX cartridges.

Available in two versions with BSP IN/OUT male connections:

- DP DS MP models with PLASTIC rotational group
- DP DS MO models with BRASS rotational group
- IN/OUT 3/4", 1"
- HEIGHTS 5", 7", 10", 20"
- Max working pressure: 8 bar (116 psi).
- Max working temperature: 45°C (113°F).

Accessories on demand: spanner, KIT AUTO (discharge automation kit), Lubrikit.

滤壳采用360度旋转连接组件，方便连接水平和垂直管道。滤壳适合带标准SX平面密封(DOE)的滤芯和带BX快速装配双O型密封圈端盖的滤芯。

滤壳带有过滤器装配接口：适合SX滤芯的特殊中心定位装置。


有两种款式的输入/输出英制(BSP)外螺纹连接：

- DP DS MP款式带有塑料旋转组件
- DP DS MO款式带有黄铜旋转组件
- 输入/输出：3/4, 1"
- 高度：5, 7, 10, 20"
- 最大工作压力：8巴(116磅/平方英寸)
- 最高工作温度：45摄氏度(113华氏度)

配置的配件：扳手，KIT AUTO(自动排放组件)，Lubrikit(润滑剂套件)。



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002

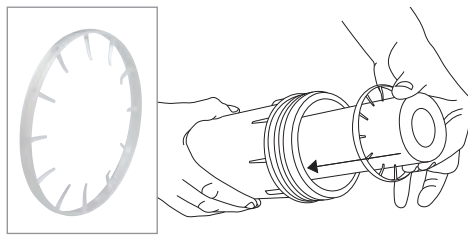

FILTERFIT
Cartridge centering device
滤芯中心定位装置





Tested and certified by IAPMO RT to NSF/ANSI 42, 61, 372 - lead free, CSA B483.1. In compliance with drinking water regulations, USA and Canada.

FILTER HOUSINGS DP BIG

Mono, Duo and Trio patented and registered manifold filter housings designed to fit BIG filter cartridges with outer diameter 4.5". Models with manometres and model with discharge valve available. Models with drain and manometer plugs. IN/OUT connections: female plastic BSP threads, NPT plastic threads.

- IN/OUT 1", 1 1/2" - HEIGHTS 10", 20" - Max working pressure: 8,3 bar (120 psi) - Max working temperature: 45°C (113°F)

Accessory included: spanner, Lubrikit.

Accessories on demand: metal wall bracket, KIT AUTO (discharge automation kit), KIT FRAME, KIT LEG (for DP BIG Frame).

为配合安装大滤芯而设计的单体，双体和三体多体式滤壳，外径4.5"，拥有专利保护。

带有压力计和带有排泄阀的款式可供选择。带有排水和压力计插头的款式。

输入/输出连接件：英制 (BSP) 塑料内螺纹，美制 (NPT) 塑料螺纹。

- 输入/输出：1,1" 1/2 - 高度：10, 20" - 最大工作压力：8,3 巴 (120磅/平方英寸)

- 最高工作温度：45摄氏度 (113华氏度)

配置的配件：扳手，Lubrikit (润滑剂套件)。

需要的配件：金属墙装托架，KIT AUTO (自动排放组件)，

成套组件框架结构，成套组件支腿 (DP BIG 框架)。

LUBRIKIT

Single-dose lubricant for housing o-ring.

适用于滤壳O型密封件的单剂量润滑剂。



10" TS



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002

排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002

10" S M TS

20" AB



FILTER HOUSINGS WITH ANTIMICROBIAL TECHNOLOGY
DP BIG SANIC

Mono, Duo and Trio patented and registered manifold filter housings with Antimicrobial Product Protection technology, designed to fit BIG SANIC filter cartridges with Antimicrobial Product Protection, outer diameter 4.50":

- FA BIG SANIC wound thread polypropylene
- CPP BIG SANIC melt-blown polypropylene

The Antimicrobial protection is performed by a proprietary technology which makes the antimicrobial agent included in the plastic matrix. Stain and odor causing bacteria are not allowed to grow on the housing surfaces, even in still water. Sanic housings in combination with FA BIG Sanic filter cartridges are the best solution for POE filtration of drinking water.

IN/OUT connections: female plastic BSP threads, NPT plastic threads.

- IN/OUT 1", 1 1/2" - HEIGHTS 10", 20"
- Max working pressure: 8,3 bar (120 psi)
- Max working temperature: 45°C (113°F)

Accessory included: spanner, Lubrikit.
Accessories on demand: metal wall bracket, KIT FRAME, KIT LEG (for DP BIG Frame).

为配合安装BIG SANIC大滤芯而设计的单体，双体和三体多体式带有抑菌保护技术的滤壳，外径4.50"，拥有专利保护。

- FA BIG SANIC 聚丙烯缠绕线
- CPP BIG SANIC 熔喷聚丙烯

抗菌保护是通过一种专有技术使抗菌剂溶于塑料基质来实现。产生细菌的污渍和气味无法在滤壳表面生成，即使在静水中也无法生成。萨尼科滤壳与萨尼科FA BIG 滤芯组合在一起是饮用水聚氧化乙烯POE过滤的最佳解决方案。

输入/输出连接件：英制 (BSP) 塑料内螺纹，美制 (NPT) 塑料螺纹。

- 输入/输出：1, 1 1/2" - 高度：10, 20"
- 最大工作压力：8,3 巴 (120磅/平方英寸)
- 最高工作温度：45摄氏度 (113华氏度)

配置的配件：扳手，Lubrikit (润滑剂套件)。
需要的配件：金属墙装托架，成套组件框架结构，成套组件支腿 (DP BIG 框架)。



Systems tested and certified by IAPMO RT against NSF/ANSI 42 for bacteriostasis effect. Components tested and certified by IAPMO RT against NSF/ANSI Standards 42 and 61 for material and structural integrity requirements only. In compliance with drinking water regulations, USA and Canada.



Powered by Microban® antimicrobial technology
MICROBAN
 MICROBAN is a registered trademark of Microban Products Company.



LUBRIKIT
 Single-dose lubricant for housing o-ring.
 适用于滤壳O型密封件的单剂量润滑剂。



10" DUO SANIC BG

10" TRIO SANIC TS

FILTER HOUSINGS

DP BIG F with metal frame

Range of Mono, Duo and Trio patented and registered manifold filter housings equipped with metal frame kit. Designed to fit BIG filter cartridges with outer diameter 4.5".

Models with drain and manometer plugs.

- IN/OUT 1", 1 1/2"
- HEIGHTS 10", 20"
- Max working pressure: 8,3 bar (120 psi)
- Max working temperature: 45°C (113°F)

Accessory included: spanner, LubriKit.

Accessories on demand: manometers, ground fixing kit.

配有金属结构组件的单体，双体和三体多体式滤壳，为配合安装大滤芯而设计，外径4.5"，拥有专利保护。

带有排水和压力计插头的款式。

- 进口/出口 1" , 1 1/2"
- 高度 10" , 20"
- 最大工作压力: 8,3 bar (120 psi)
- 最高工作温度: 45° C (113° F)

包括的配件: 扳手，润滑套件。

按需求提供的配件: 压力计，地面固定套件。



LUBRIKIT
Single-dose lubricant
for housing o-ring.

适用于滤壳O型密封件的
单剂量润滑剂。



FILTER HOUSINGS

DP BIG F SANIC with metal frame

Range of Mono, Duo and Trio patented and registered manifold filter housings with Antimicrobial Product Protection technology, equipped with metal frame kit.

Designed to fit BIG SANIC filter cartridges with outer diameter 4.5".

- IN/OUT 1", 1 1/2"
- HEIGHTS 10", 20"
- Max working pressure: 8,3 bar (120 psi)
- Max working temperature: 45°C (113°F)

Accessory included: spanner, LubriKit.

Accessory on demand: ground fixing kit.

配有金属结构组件的单体，双体和三体多体式带有抑菌保护技术的滤壳，为配合安装BIG SANIC大滤芯而设计，外径4.5"，拥有专利保护。

- 进口/出口 1" , 1 1/2"
- 高度 10" , 20"

- 最大工作压力: 8,3 bar (120 psi)
- 最高工作温度: 45° C (113° F)

包含的配件: 扳手，润滑套件。

按需求提供的配件: 地面固定套件。



10" MONO F SANIC TS



10" DUO F SANIC BG

Powered by Microban® antimicrobial technology
MICROBAN

MICROBAN is a registered trademark of Microban Products Company.

SELF-CLEANING FILTERS

HYDRA

Self-cleaning filters with back-wash and exclusive filter cartridges, 90 or 50 micron.

Flow rates from 3000 to 10000 l/h.

IN/OUT connections: female brass or plastic BSP threads, NPT plastic threads.

- IN/OUT 1/2", 3/4", 1", 1 1/4", 1 1/2"
- Max working pressure:
BSP versions 8 bar (116 psi).
NPT versions 8,6 bar (125 psi).
- Max working temperature:
HYDRA / HYDRA K 45°C (113°F).
HYDRA HOT 80°C (176°F).

Accessories included: spanner, wall bracket.

Accessories on demand: brass and plastic nipples, KIT AUTO (discharge automation kit), Lubrikit.

自动清洗过滤器带有回洗和专用的滤芯，90或50微米。流量从3000至10000升/小时。输入/输出连接件：英制(BSP)黄铜或塑料内螺纹，美制(NPT)塑料螺纹。

- 输入/输出：1/2, 3/4, 1", 1" 1/4, 1" 1/2"
- 最大工作压力：
BSP 版本8 bar (116 psi)
NPT 版本 8,6bar (125 psi)
- 最高工作温度：
HYDRA / HYDRA K 45° C (113° F).
HYDRA HOT 80° C (176° F).

配置的配件：扳手，金属墙装托架。

需要的配件：黄铜和塑料接头，KIT AUTO (自动排放组件)，Lubrikit (润滑剂套件)。

DISCHARGE AUTOMATION KIT

KIT AUTO

Programmable kit with electro-valve for the full automation of discharge and self-cleaning operations.

带有电动阀的可编程套件使排放和自动清洗操作全自动化。



M RAH



RAH



MP RLH



RSH



K RAH



HOT



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
← **排泄漏斗**
回流 避碰装置
UNI EN 1717-11/2002



Tested and certified by IAPMO RT to NSF/ANSI 42, 61, 372 - lead free, CSA B483.1. In compliance with drinking water regulations, USA and Canada.

SELF-CLEANING FILTERS

HYDRA DS

Self-cleaning filters with back-wash provided with 360° rotational connection group for easy connection to horizontal or vertical pipes.

Available in two versions with BSP IN/OUT male connections:

- HYDRA DS MP models with PLASTIC rotational group
 - HYDRA DS MO models with BRASS rotational group
- Models with exclusive filter cartridges, 90 or 50 micron.

Flow rates from 3000 to 6000 l/h.

- IN/OUT 3/4", 1"
- Max working pressure: 8 bar (116 psi)
- Max working temperature: 45°C (113°F)

Accessory included: spanner.

Accessories on demand: KIT AUTO (discharge automation kit), Lubrikit.

具有回洗功能的自动清洗过滤器带有360度旋转连接组件，易于连接水平或垂直管道。有两种款式的输入/输出英制 (BSP) 外螺纹连接：

- HYDRA DS MP款式带有塑料旋转组件
 - HYDRA DS MO款式带有黄铜旋转组件
- 款式带有专用滤芯，90或50微米。

流量从3000至6000升/小时。

- 输入/输出：3/4" , 1"
- 最大工作压力：8巴 (116磅/平方英寸)
- 最高工作温度：45摄氏度 (113华氏度)

配置的配件： 扳手。

需要的配件： KIT AUTO (自动排放组件), Lubrikit (润滑剂套件)。



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002



MP RAH

MP RSH

MP RLH

MO RAH

MO RSH

MULTI-STAGE RAINWATER FILTERS

HYDRA RAINMASTER

Exclusive DUO and TRIO multi-stage filters, with a self-cleaning pre-filter plus post-filtration and treatment cartridges, especially designed for the filtration and treatment of rainwater.

IN/OUT connections: female brass or plastic BSP threads, NPT plastic threads. Flow rates from 2800 l/h to 5500 l/h. Housings provided with Filterfit: special centering device for SX cartridges.

- IN/OUT 1/2", 3/4", 1"
- Max working pressure:
BSP versions 8 bar (116 psi).
NPT versions 8,6 bar (125 psi).
- Max working temperature: 45°C (113°F)

Accessories on demand: brass and plastic nipples, spanner, wall brackets, KIT AUTO (discharge automation kit), Lubrikit.

独有的双座和三座多级过滤器，具有自动清洁，预过滤加上后过滤和后处理滤芯，设计专门适用于雨水的过滤和处理。

输入/输出连接件：英制 (BSP) 黄铜或塑料内螺纹，美制 (NPT) 塑料螺纹。流量从2800升/小时至5500 升/小时。滤壳带有过滤器装配接口：适合SX滤芯的特殊中心定位装置。

- 输入/输出：1/2, 3/4, 1"
- 最大工作压力：
BSP 版本8 bar (116 psi)
NPT 版本 8,6bar (125 psi)
- 最高工作温度：45摄氏度 (113华氏度)

需要的配件：黄铜和塑料接头，扳手，墙装托架，KIT AUTO (自动排放组件)，Lubrikit (润滑剂套件)。



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002



TRIO RAH / CB-EC



TRIO RAH / LA



DUO RAH / CB-EC



DUO RAH / LA

MULTI-STAGE SELF-CLEANING FILTERS

HYDRA DUO and TRIO

Exclusive multi-stage filters with self-cleaning pre-filter, for dual and triple stage filtration/treatment. Self-cleaning pre-filter with back-wash. Cartridges for second and third stage available from the wide range of Atlas Filtri cartridges.

IN/OUT connections: female brass or plastic BSP threads, NPT plastic threads.

Housings provided with Filterfit: special centering device for SX cartridges.

- IN/OUT 1/2", 3/4", 1"
- Max working pressure:
BSP versions 8 bar (116 psi).
NPT versions 8,6 bar (125 psi).
- Max working temperature: 45°C (113°F)

Accessories on demand: brass and plastic nipples, KIT AUTO (discharge automation kit), Lubrikit.

独有的多级过滤器带有自动清洁预过滤器，双阶段和三阶段过滤和处理。

自动清洁预过滤器具有回洗功能和独有的过滤滤芯。雅德拉斯过滤器有限公司的滤芯产品范围很广，可提供第二和第三阶段的滤芯。

输入/输出连接件：英制 (BSP) 黄铜或塑料内螺纹，美制 (NPT) 塑料螺纹。

滤壳带有过滤器装配接口：适合 SX 滤芯的特殊中心定位装置。

- 输入/输出：1/2, 3/4, 1"
- 最大工作压力：
BSP 版本 8 bar (116 psi)
NPT 版本 8,6 bar (125 psi)
- 最高工作温度：45 摄氏度 (113 华氏度)

需要的配件： 墙装托架，KIT AUTO (自动排放组件)，Lubrikit (润滑剂套件)。



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002

FILTER HOUSINGS

K DP, FX AF, XX

K DP brass head housings (fit to cartridges SX, BX and CX).

FX AF brass head, stainless steel housings bowls.

XX full stainless steel housings.

- HEIGHTS 5", 7", 10", 20"
- K DP max pressure: 10 bar (145 psi), 45°C (113°F)
- FX AF max pressure: 16 bar (232 psi), 80°C (176°F)
- XX max pressure: 25 bar (363 psi), 100°C (212°F)

Accessories on demand: spanner, wall brackets, brass nipples, KIT AUTO (discharge automation kit), Lubrikit.

K DP 黄铜端盖滤壳 (适合 SX, BX 和 CX 滤芯)

FX AF 黄铜端盖，不锈钢滤壳碗。

XX 全不锈钢滤壳。

- 高度：5, 7, 10, 20"
- K DP 最大压力：10 巴 (145 磅/平方英寸), 45 摄氏度 (113 华氏度)
- FX AF 最大压力：16 巴 (232 磅/平方英寸), 80 摄氏度 (176 华氏度)
- XX 最大压力：25 巴 (363 磅/平方英寸), 100 摄氏度 (212 华氏度)

需要的配件： 扳手，墙装托架，黄铜接头，KIT AUTO (自动排放组件)，Lubrikit (润滑剂套件)。



DRAIN FUNNEL
Back-flow preventing device
UNI EN 1717-11/2002
排泄漏斗
回流 避碰装置
UNI EN 1717-11/2002

K DP

K DP S M

FX AF

XX



MOBILE FILTER HOUSINGS

DEPURAL®



DUPLEX

Patented mobile filter housings designed for the installation at counter-top. Complete with universal tap adaptor and installation kit.

DEPURAL® and DEPURAL® Duplex models, for 10" cartridges with standard SX flat seals (DOE).

- Max working pressure: 3 bar (43 psi)
- Max working temperature: 45°C (113°F)

Accessories on demand: spanner, wall bracket (Depural® Duplex), installation kit with diverter valve, Lubrikit.

拥有专利设计的移动式过滤器滤壳，设计安装在台面上。配有通用水龙头适配器和安装套件。德普拉尔DEPURAL®和德普拉尔双座DEPURAL® Duplex款式，滤壳适合带标准SX平面密封(DOE)的10"滤芯。

- 最大工作压力：3巴 (43磅/平方英寸)
- 最高工作温度：45摄氏度 (113华氏度)

需要的配件：扳手，墙装托架 (Depural® Duplex)，带分流阀的安装套件，Lubrikit (润滑剂套件)。

MOBILE FILTER HOUSINGS

DEPURAL® TOP

Mobile filter housings especially designed for the installation at counter-top. Complete with tap diverter valve and installation kit. Single, DUO and TRIO models, for 10" cartridges with both standard SX flat seals (DOE) and BX quick-fit double o-ring.

- Max working pressure: 3 bar (43 psi)
- Max working temperature: 45°C (113°F)

Accessories on demand: Lubrikit.

移动式过滤器滤壳，特别设计安装在台面上。配有水龙头分流阀和安装套件。

单座，双座和三座款式，滤壳适合带标准SX平面密封 (DOE) 的滤芯和带BX快速装配双O型密封圈的10"滤芯。

- 最大工作压力：3巴 (43磅/平方英寸)
- 最高工作温度：45摄氏度 (113华氏度)

需要的配件：Lubrikit (润滑剂套件)。



MOBILE FILTER HOUSINGS

DEPURAL® DP and DEPURAL® DP CASE

Mobile filter housings designed for the installation at counter-top. Complete with universal tap adaptor and installation kit.

MONO, DUO and TRIO patented and registered models, for cartridge heights 5", 7", 10" with standard SX flat seals (DOE) and BX quick-fit double o-ring.

All models provided with Filter-Fit: special centering device for SX cartridges.

Exclusive portable model DEPURAL® DP CASE.

- Max working pressure: 3 bar (43 psi)
- Max working temperature: 45°C (113°F)

Accessories on demand: Lubrikit.

移动式过滤器滤壳，特别设计安装在台面上。配有通用水龙头适配器和安装套件。

单座，双座和三座获得专利和注册的款式，滤壳适合带标准SX平面密封 (DOE) 和带BX快速接头双O型密封圈高度5", 7", 10" 的滤芯。所有款式带有过滤器接口：适合SX滤芯的特殊中心定位装置。

独有的便携式款式DEPURAL® DP CASE。



- 最大工作压力：3巴 (43磅/平方英寸)
- 最高工作温度：45摄氏度 (113华氏度)

需要的配件：Lubrikit (润滑剂套件)。



REVERSE OSMOSIS UNITS WITH MADE IN ITALY COMPONENTS

OASIS DP RO

OASIS DP is a range of RO units made up with patented and registered DP TRIO filter housings and with RO VESSEL, exclusive reverse osmosis membrane housing with double o-ring.

- OASIS DP with metal wall bracket: OASIS DP STD, OASIS DP PUMP, OASIS DP UV, OASIS DP PUMP-UV.

- OASIS DP-F with metal frame: OASIS DP-F PUMP, OASIS DP-F PUMP-UV

Max working pressure: 8 bar (116 psi).

Max working temperature: 45°C (113°F).

Accessories included: spanner, Filterfit, installation kit, 12 liters metal storage tank, Lubrikit.

OASIS DP是拥有专利保护的带有DP TRIO滤壳和独具双O型圈反渗透膜壳RO VESSEL的反渗透设备。

- 带有金属墙体支架的OASIS DP: OASIS DP STD, OASIS DP PUMP, OASIS DP UV, OASIS DP PUMP-UV.

- 带有金属框架结构的OASIS DP-F: OASIS DP-F PUMP, OASIS DP-F PUMP-UV

- 最大工作压力: 8巴 (116磅/平方英寸)

- 最高工作温度: 45摄氏度 (113华氏度)

包含的配件: 扳手, 过滤套件, 安装套件, 12升金属储水罐, 润滑套件。



OASIS DP-F PUMP UV



OASIS DP STD



OASIS DP UV



OASIS DP PUMP

COMPONENTS FOR

UNDER-SINK UNITS

Housings DP Mono, Duo and Trio patented and registered models, for both cartridges with standard SX flat seals (DOE) and for cartridges with BX quick-fit double o-ring end-cap.

Models with transparent or opaque bowls.

IN/OUT connections AT 1/4" and 3/8" with plastic BSP or NPT threads.

RO Vessel for 1812 and 2012 Reverse Osmosis membrane housing with double o-ring sealing.

IN/OUT connections 1/4" and 1/8" with plastic BSP threads.

Accessory on demand: spanner, wall brackets, Lubrikit.

DP单体, 双体和三体滤壳均适合带有标准SX扁平密封圈 (DOE) 的滤芯和带有BX快速插入双O型圈端盖的滤芯。

款式带有透明或不透明滤碗。

输入/输出连接件1/4" 和3/8" 塑料英制 (BSP) 或美制 (NPT) 螺纹。

带有双O型密封的1812和2012反渗透薄膜滤壳配置的反渗透管。

输入/输出连接件1/4" 和1/8" 塑料英制(BSP)螺纹。

需要的配件: 扳手, 墙体支架, 润滑套件。



DP TRIO



RO VESSEL

SANIC

WATER FILTERS WITH
ANTIMICROBIAL
TECHNOLOGY

REVERSE OSMOSIS UNITS WITH MADE IN ITALY COMPONENTS

OASIS DP SANIC

OASIS DP SANIC is a range of RO units made up with patented and registered DP TRIO SANIC filter housings and with RO VESSEL SANIC, exclusive reverse osmosis membrane housing with double o-ring, featuring Antimicrobial Product Protection provided by silver-based technology which prevents the growth of stain and odor causing bacteria, keeping the unit cleaner for longer.

- OASIS DP SANIC with metal wall bracket: OASIS DP SANIC STD, OASIS DP SANIC PUMP, OASIS DP SANIC UV, OASIS DP SANIC PUMP-UV
- OASIS DP-F SANIC with metal frame: OASIS DP-F SANIC PUMP, OASIS DP-F SANIC PUMP-UV.
- Max working pressure: 8 bar (116 psi)
- Max working temperature: 45°C (113°F)

Accessories included: spanner, Filterfit, installation kit, 12 liters metal storage tank, Lubrikit.

OASIS DP SANIC是拥有专利保护的带有DP TRIO SANIC抑菌滤壳和独具双O型圈反渗透膜壳RO VESSEL SANIC的反渗透设备,拥有银基介质科技的抑菌保护功能,避免了造成产生细菌的污渍和异味的生成,使设备长久保持干净。

- 带有金属墙体支架的OASIS DP SANIC: OASIS DP SANIC STD, OASIS DP SANIC PUMP, OASIS DP SANIC UV, OASIS DP SANIC PUMP-UV
 - 带有金属框架结构的OASIS DP-F SANIC: OASIS DP-F SANIC PUMP泵, OASIS DP-F SANIC PUMP-UV紫外线泵。
 - 最大工作压力: 8 巴 (116磅/平方英寸)
 - 最高工作温度: 45摄氏度 (113华氏度)
- 包含的配件:** 扳手, 过滤套件, 安装套件, 12升金属储水罐, 润滑套件。



OASIS DP SANIC STD



OASIS DP SANIC PUMP



OASIS DP SANIC UV



OASIS DP SANIC PUMP UV



OASIS DP F SANIC PUMP



OASIS DP F SANIC PUMP UV

Powered by Microban® antimicrobial technology

MICROBAN

MICROBAN is a registered trademark of Microban Products Company.

ANTIMICROBIAL COMPONENTS FOR

UNDER-SINK UNITS - 水槽下置式单元

DP Mono, Duo and Trio SANIC with Antimicrobial Product Protection technology, patented and registered housings. IN/OUT connections at 1/4" and 3/8" with plastic BSP or NPT threads.

Housings provided with Filter-Fit: special centering device for SX cartridges.

RO Vessel SANIC for 1812 and 2012 Reverse Osmosis membrane housing with double o-ring and Antimicrobial Product Protection technology. IN/OUT connections 1/4" and 1/8" with plastic BSP threads.

Accessory on demand: spanner, wall brackets, Lubrikit.

萨尼可DP Mono, Duo和Trio过滤器滤壳拥有抗菌产品保护技术, 获得专利和注册商标。

输入/输出连接件1/4" 和3/8" 塑料英制 (BSP) 或美制 (NPT) 螺纹。

带有双O型密封圈和抗菌产品保护技术的。RO SANIC 1812和2012反渗透薄膜滤壳配置的反渗透管。输入/输出连接件1/4" 和1/8" 塑料英制 (BSP) 螺纹。

需要的配件: 扳手, 墙体支架, 润滑套件。



DP TRIO SANIC



RO VESSEL SANIC

UNDER-SINK FILTER HOUSINGS

BRAVO DP and BRAVO DP CASE

Mono, Duo and Trio patented and registered filter housings designed for the installation under the kitchen sink. For cartridges with standard SX flat seals (DOE) and for cartridges with BX quick-fit double o-ring. Housings complete with installation kit and provided with Filter-Fit: special centering device for SX cartridges.

Models with transparent or opaque bowls.

Portable model BRAVO DP CASE with TRIO filter housing in a plastic case with easy connection kit.

- Max working pressure: 8 bar (116 psi)

- Max working temperature: 45°C (113°F)

Accessory on demand: standing base, Lubrikit.

拥有专利和注册商标的单座，双座和三座过滤器滤壳专门设计适用于安装在厨房水槽下方。滤芯带有标准SX平面密封 (DOE) 和BX快速装配双O型密封圈。滤壳带有全套安装配件并提供过滤器滤壳带有过滤器装配接口：适合SX滤芯的特殊中心定位装置。

型号有透明或不透明滤碗款式。

便携式BRAVO DP CASE三座过滤器滤壳设计在一个塑料箱内，带有易于连接的套件。

- 最大工作压力：8巴 (116磅/平方英寸)

- 最高工作温度：45摄氏度 (113华氏度)

需要的配件： 固定底座，润滑套件。



COMPONENT FOR

IN-LINE HOUSINGS

In-line Filter Housing with double o-ring sealing. IN/OUT connections 1/4" with plastic BSP or NPT threads.

- Max pressure: 8 bar (116 psi), 45°C (113°F).

Accessories on demand: installation kit, spanner, clips, Lubrikit.

带有双O型密封圈的直线型过滤器滤壳，仅适用于专用的滤芯。 输入/输出连接件：1/4" 塑料英制 (BSP) 或美制 (NPT) 螺纹。

- 最大工作压力：8巴 (116磅/平方英寸)，45摄氏度 (113华氏度)

按需求的配件： 安装套件，扳手，夹子，润滑套件。

FILTER HOUSINGS

IN-LINE

Straight in-line filters designed for the installation under the kitchen sink.

Proprietary design with double o-ring sealing. Complete with installation kit.

- Max pressure: 8 bar (116 psi), 45°C (113°F).








Accessory on demand: Lubrikit. Fits only to proprietary In-Line cartridges.

直线型过滤器设计适用于安装在厨房水槽下方。

双O型密封圈的专利设计。配置成套安装组件。

- 最大工作压力：8巴 (116磅/平方英寸)，45摄氏度 (113华氏度)

需要的配件： Lubrikit (润滑剂套件)。仅适用于专用的直线型滤芯。

-  - CPP In-line melt-blown (sediment).
-  - CPP 直线式熔喷 (沉淀物)
-  - CA-SE In-line carbon block (sediment, chlorine, taste, odours).
-  - CA-SE 直线式炭块 (沉淀物，氯，异味，臭味)
-  - LA In-line granular activated carbon (GAC: chlorine, taste, odours).
-  - LA 直线式活性炭颗粒 (GAC: 氯，异味，臭味)
-  - HA In-line polyphosphate crystals (anti-scale).
- - HA 直线式多聚磷酸盐晶体 (防水垢)
- - P In-line empty container for filling with required media.
- - P 直线式空壳以便填充不同需求的介质



CARTRIDGES

A wide range of filter cartridges, for sediment filtration and water treatment, made with various filtering and treating media.

- SX models suitable to Atlas Filtri SX and DP housings and to major standard housings.
- BX models for exclusive use with Atlas Filtri housings 3P Plus BX, DP and K Plus.
- CX models for exclusive use with Atlas Filtri housings 3P Plus CX and K DP.
- Models with standard OD 62 mm (2.5").
- Models 5" M Mignon with OD 45 mm (1.80").
- Models BIG for DP BIG and every housings with OD 115 mm (4.5").

产品范围广泛的过滤滤芯，由各种过滤和处理介质制成，适用于泥沙沉淀物过滤和水处理。

- SX型适用于雅德拉斯过滤器SX和DX滤壳和主要的标准滤壳。
- BX型专用于雅德拉斯过滤器3P Plus BX, DP和K Plus滤壳。
- CX型专用于雅德拉斯过滤器3P Plus CX和K DP滤壳。
- 外径62毫米 (2.5") 标准型。
- 5" M 外径45毫米 (1.80") 小巧型。
- 适用于DP BIG和所有外径115毫米 (4.5") 滤壳的大型号。



SX - Standard double open end (DOE) configuration with flat seals. All SX cartridges are provided with the new grey flat seals with Antimicrobial Product Protection technology.

SX - 标准底端双开口 (DOE) 配置平密封圈。所有SX滤芯提供新款灰色平密封圈与抗菌产品保护技术。



BX - Quick-fit configuration with 45 mm double o-ring end-cap.

BX - 端盖45毫米快速装配双O型密封圈。



CX - Quick-fit configuration with 57 mm double o-ring end-cap.

CX - 端盖57毫米快速装配双O型密封圈。



SEDIMENT FILTRATION - 泥沙沉淀物过滤

A wide range of filter cartridges made with various filter media, height available from 4" to 60", filter rate available from 0.2 to 100 micron. Custom made height and filter rates available on minimum quantity.

范围广泛的各种过滤介质，可供选择高度从4"至60"，过滤速率从0.2至100微米。在最低数量可特别定制高度和过滤速率。

TS - pleated polyester net - 50 micron

CS - pleated paper - 25 micron

GA - quartzite block - 10 micron

AB - ceramic - 0.45 micron

AC - polypropylene-borosilicate
0.2 micron and 0.45 micron

RL - polyester washable net
50 micron and 90 micron

RL C - polyester washable net
50 micron and 90 micron

RL A - stainless steel washable net - 70 micron

RA - stainless steel washable net - 70 micron

SA - stainless steel washable net - 50 micron

RS - pleated polypropylene washable net
50 micron

TS - 打褶聚酯网-50微米

CS - 打褶纸-25微米

GA - 石英块-10微米

AB - 陶瓷-0.45微米

AC - 聚丙烯硼硅 0.2微米和0.45微米

RL - 可洗聚酯网 50微米和90微米


RL C - 可洗聚酯网 50微米和90微米

RL A - 可洗不锈钢网-70 微米

RA - 可洗不锈钢网-70微米

SA - 可洗不锈钢网-50 微米

RS - 可洗打褶聚酯网-50微米

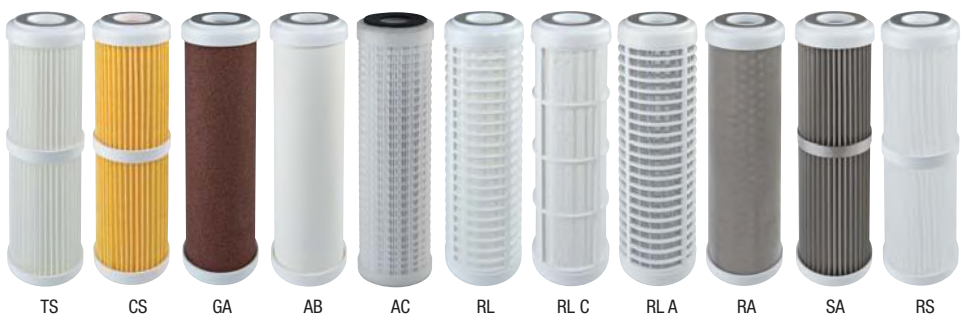

CPP and PP

MELT-BLOWN polypropylene cartridges with benefits in high-efficiency filtration.

Customized and OEM products.

CPP "melt-blown" smooth, filter rates from 1 to 50 micron, heights from 4" to 60". Outer diameter: 56 or 62 mm (2.2" or 2.5").

CPP BIG models with outer diameter 115 mm (4.50"). Heights 10" and 20", suitable for DP BIG housings.

PP "melt-blown" grooved, filter rates from 1 to 50 micron, heights 10", 20". Outer diameter: 56 or 62 mm (2.2" or 2.5").

- Max working temperature: 80°C (176°F)

熔喷聚丙烯滤芯具有高效过滤的特点。

定制和OEM代加工产品。

CPP氯化聚丙烯“熔喷”光滑，过滤滤速从1至50微米，高度从4”至60”。外径：56或62毫米(2.2”或2.5”)。

CPP BIG款式 外径115mm(4.50”)，高度10”和20”，适合DP BIG大滤壳。PP聚丙烯“熔喷”沟槽，过滤滤速从1至50微米，高度10”和20”。外径：56或62毫米(2.2”或2.5”)。

- 最高工作温度：80摄氏度(176华氏度)

FA

Wound polypropylene thread filter cartridges available in a wide range of configurations.

Filter rates from 1 to 100 micron.

- FA Mignon: OD 45 mm (1.8") ID 18 mm (0.7"), height 5".

- FA-R series: OD 56 mm (2.2") ID 28 mm (1.1"), height 10".

- FA series: OD 63 mm (2.4") ID 28 mm (1.1"), heights from 4" to 40".

- FA BIG series: OD 115 mm (4.5") ID 28 mm (1.1"), heights 10" and 20". Suitable for DP BIG housings.

- Max working temperature: 45°C (113°F)

卷绕型聚丙烯玻璃纤维过滤滤芯有广泛的配置。

过滤滤速从1至100微米。

- FA小巧型：外径45毫米(1.8”)内径18毫米(0.7”)，高度5”。

- FA-R系列：外径56毫米(2.2”)内径28毫米(1.1”)，高度10”。

- FA系列：外径63毫米(2.4”)内径28毫米(1.1”)，高度从4”至40”。

- FA大型：外径115毫米(4.5”)内径28毫米(1.1”)，高度从10”至20”，适合DP BIG大滤壳。

- 最高工作温度：45摄氏度(113华氏度)

FA HOT

Polypropylene thread filter cartridges wound on a special reinforced-polypropylene inner core, suitable to PLUS HOT 3P housings, for hot water filtration.

Heights from 5" to 20". Filter rates from 1 to 100 micron.

- Max working temperature: 80°C (176°F)

聚丙烯玻璃纤维过滤滤芯卷绕在特制的增强型聚丙烯内芯上，适合PLUS HOT 3P滤壳，用于热水过滤。

高度从5”至20”，过滤滤速从1微米至100微米。

- 最高工作温度：80摄氏度(176华氏度)





SEDIMENT CARTRIDGES 沉淀物滤芯

Sediment filter cartridges provided with Antimicrobial Product Protection technology.

- CPP SANIC, PP melt-blown cartridges heights from 5 to 60", filter rates from 1 to 50 micron, outer diameter at 56 or 62 mm (2.2" or 2.5").
Max working temperature: 80°C (176°F).
- FA SANIC, wound PP thread heights from 4" to 40", filter rates from 1 to 100 micron, outer diameter at 18 mm (1.77"), 56 mm (2.20") and 62 mm (2.40").
Max working temperature: 45°C (113°F).
- CPP BIG SANIC and FA BIG SANIC models with outer diameter 115 mm (4.50"). Heights 10" and 20", suitable for DP BIG SANIC housings.

泥沙沉淀物过滤滤芯具有抗菌产品保护技术


- 萨尼科氯化聚丙烯，聚丙烯熔喷滤芯高度从5"至60"，过滤滤速从1微米至50微米，外径为56毫米或62毫米(2.2"或2.5")，最高工作温度：80摄氏度(176华氏度)。
- 萨尼科FA SANIC，聚丙烯玻璃纤维卷绕型高度从4"至40"，过滤滤速从1微米至100微米，外径为18毫米(1.77")，56毫米(2.2")和62毫米(2.40")。最高工作温度：45摄氏度(113华氏度)。
- CPP BIG SANIC和FA BIG SANIC款式 外径115mm(4.50")，高度10"和20"，适合DP BIG SANIC滤壳



10" Sanic cartridges in combination with Sanic housings as complete systems are **tested and certified by IAPMO RT against NSF/ANSI 42 for bacteriostasis effect.** Components tested and certified by IAPMO RT against NSF/ANSI Standards 42 and 61 for material and structural integrity requirements only. In compliance with drinking water regulations, USA and Canada.



MICROBAN is a registered trademark of Microban Products Company.

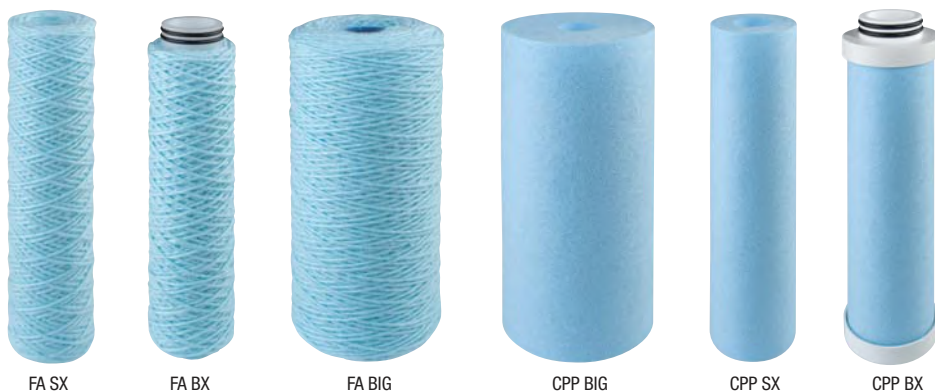

WATER FILTER BIG CARTRIDGES

10" and 20" BIG Filter cartridges with 4,50" outer diameter for DP BIG housings:

- **CS BIG** pleated paper, filter rate 25 micron - **TS BIG** pleated polyester fabric, filter rate 50 micron - **SA BIG** pleated stainless steel net, filter rate 50 micron
- **RA BIG** stainless steel net, filter rate 70 micron (cylindrical filter cartridge).

10" 和 20" 大滤芯，外径4.50" 适合DP BIG滤壳：

- **CS BIG** 褶皱纸，过滤精度25 micron - **TS BIG** 百褶皱聚酯涤纶，过滤精度50 micron - **SA BIG** 不锈钢褶皱网，过滤精度50 micron - **RA BIG** 不锈钢网，过滤精度70 micron (圆柱体滤芯)



WATER TREATMENT 水处理

Extensive range of filter cartridges for every application in water treatment, made with the most appropriate media. Cartridge height available from 4" to 20", filter rate available from 0.2 to 50 micron. Custom made height, filter rates and special media available on minimum quantity.

GAC chlorine, taste, odor reduction.

LA granular activated carbon (GAC)

FA CA - wound PP thread and GAC, 5 - 100 micron

CA - melt-blown PP and GAC, 25 micron

BT CPP LA - melt-blown PP and GAC, 50 micron

CARBON BLOCK chlorine, taste, odor reduction.

CA SE - carbon block, 0,3 - 5 micron

CA SE HF - carbon block, hollow fibre membranes 0,15 - 0,02 micron

CB EC - carbon block, 1 - 10 micron

CB EC BIG - carbon block, 1 - 10 micron

POLYPHOSPHATE anti-scale, anti-corrosion.

HA - polyphosphate crystals

BT CPP HA - melt-blown PP and polyphosphate crystals, 5 - 50 micron

BT RL HA - polyester net and polyphosphate crystals, 50 micron

FA HA - wound PP thread and polyphosphate crystals, 5 - 100 micron

CPP HA - melt-blown PP and polyphosphate crystals, 5 - 25 micron

IONIC EXCHANGE RESINS.

QA CF - strong cationic resin

QA AF - anionic resin nitrates selective

QA LM - mixed bed resin

FILLABLE CARTRIDGES

P - empty container

范围广泛的过滤器滤芯适用于水处理领域的各种应用，由最合适的介质制成。滤芯可供选择的高度从4"至20"，过滤滤速从0.2微米至50微米。按最低数量可特别定制高度，过滤滤速和特殊介质。

GAC 降低氯，味道和气味

LA 颗粒活性炭(GAC)

FA CA - 卷绕型聚丙烯玻璃纤维和颗粒活性炭, 5-100微米

CA - 熔喷聚丙烯和颗粒活性炭, 25微米

BT CPP LA - 熔喷聚丙烯和颗粒活性炭, 50微米

炭块 降低氯，味道和气味

CA SE - 炭块, 0.3-5微米

CA SE HF - 炭块, 中空纤维薄膜, 0.15-0.02微米

CB EC - 炭块, 1-10微米

CB EC BIG - 炭块, 1-10微米

多聚磷酸盐 防垢, 抗腐蚀

HA - 多磷酸盐晶体

BT CPP HA - 熔喷聚丙烯和多磷酸盐晶体, 5-50微米

BT RL HA - 聚酯网和多磷酸盐晶体, 50微米

FA HA - 卷绕型聚丙烯玻璃纤维和多磷酸盐晶体, 5-100微米

CPP HA - 熔喷聚丙烯和多磷酸盐晶体, 5-25微米

离子交换树脂

QA CF - 强阳离子树脂

QA AF - 阴离子树脂选择性硝酸盐

QA LM - 混合床式树脂

可填充式滤芯

P - 空箱



ANTI-SCALE SYSTEMS 防垢系统

Polyphosphate dosing systems with polyphosphate crystals (DOSAPROP, DOSAFOS, DOSAL), with ready-to-use polyphosphate charge or with polyphosphate powder (DOSAPLUS).

聚磷酸盐配置系统：多磷酸盐晶体 (DOSAPROP, DOSAFOS, DOSAL), 立即可使用的多磷酸盐充电或多磷酸盐粉末 (DOSAPLUS)。

POLYPHOSPHATE POWDER DOSING SYSTEMS

DOSAPLUS

Proportional dosing systems, designed for the maximum polyphosphate release of 5 mg/l in compliance with UE Directive 98/83/CE for use in drinking water.

All models provided with 360° rotational group for the easy connection to horizontal or vertical pipes.

- DOSAPLUS 5 and 6 with brass rotational group.
- DOSAPLUS 7 with plastic rotational group.
- DOSAPLUS 2 brass head and brass rotational group. By-pass valve integrated.
- DOSAPLUS 3 plastic head and brass rotational group. By-pass valve integrated.
- DOSAPLUS 4 plastic head and brass rotational group.
- DOSAPLUS 13 - 14 plastic head and rotational group.
- Max working pressure: 8 bar (116 psi)
- Max working temperature: 45°C (113°F)

Accessories on demand: adaptor for boilers, Lubrikit.

Polyphosphate refill charge: ready-to-use refill.

按比例配置系统, 专为符合欧盟饮用水UE指令98/83/CE多磷酸盐最大排放5毫克/升而设计。

所有型号提供360度旋转连接组件, 易于连接水平和垂直管件。


- DOSAPLUS 5和6带黄铜旋转组件。
- DOSAPLUS 7带塑料旋转组件。
- DOSAPLUS 2带黄铜端盖和黄铜旋转组件, 旁通阀。
- DOSAPLUS 3带塑料端盖和黄铜旋转组件, 旁通阀。
- DOSAPLUS 4带塑料端盖和黄铜旋转组件。
- DOSAPLUS 13 - 14塑料盖和旋转组件。
- 最大工作压力: 8巴 (116磅/平方英寸)
- 最高工作温度: 45摄氏度 (113华氏度)

需要的配件: 锅炉适配器, Lubrikit (润滑剂组件)。

聚磷酸盐可充式配件: 立即可使用进行充装。



DOSAPLUS 7

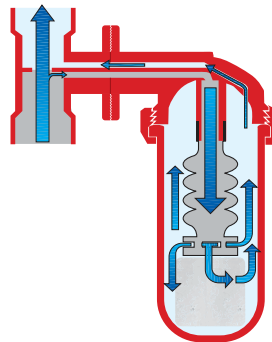

Proportional dosing system equipped with device providing "Venturi" effect, dosing polyphosphate in compliance with UE Directive 98/83/CE for drinking water.

按比例配置系统配备提供“文丘里流量”效果的流量装置, 多磷酸盐配置符合欧盟饮用水UE指令98/83/CE。



DOSAPLUS 2

DOSAPLUS 13

DOSAPLUS 14



POLIPHOS A
REFILL FOR DOSAPLUS 2-3-4
DOSAPLUS 2-3-4 填充



POLIPHOS B
REFILL FOR DOSAPLUS 5-6-7
DOSAPLUS 5-6-7 填充

DOSAPROP PLUS

Proportional dosing systems in compliance with UE Directive 98/83/CE for use in drinking water.

Models with loose crystals and diffuser tube and with polyphosphate cartridge. IN/OUT connections with brass BSP threads. 3P and 2P models.

MIGNON models S and L designed for boiler protection.

- IN/OUT 1/2", 3/4", 1"
- HEIGHTS 5" M, 4", 5", 7", 10"
- Max working pressure: 8 bar (116 psi)
- Max working temperature: 35°C (95°F)
- Max total hardness: 500 CaCO₃ (50°F)

Accessories on demand: spanner, wall brackets, brass and plastic nipples, Lubrikit.

按比例配量系统符合欧盟饮用水UE指令98/83/CE。款型配有松散晶体和扩散管以及多磷酸盐滤芯。输入/输出连接件带黄铜英制 (BSP) 螺纹。3P和2P型号。

小巧型S和L型为锅炉保护设计。

- 输入/输出: 1/2", 3/4", 1"
- 高度: 5" M, 4", 5", 7", 10"
- 最大工作压力: 8巴 (116磅/平方英寸)
- 最高工作温度: 35摄氏度 (95华氏度)
- 最大总硬度: 500碳酸钙 (50华氏度)

需要的配件: 扳手, 墙装托架, 黄铜和塑料接头, Lubrikit (润滑剂组件)。



Proportional dosing system equipped with device providing "Venturi" effect, dosing polyphosphate in compliance with UE Directive 98/83/CE for drinking water. 按比例配量系统配备提供“文丘里流量”效果的流量装置, 多磷酸盐配量符合欧盟饮用水UE指令98/83/CE。

DOSAFOS PLUS

Non-proportional dosing systems.

MIGNON models S, L and SL (3 ports) designed boiler protection. Models with polyphosphate cartridge or with loose crystals. BSP and NPT threads.

- IN/OUT 1/2", 3/4", 1"
- HEIGHTS 5" M, 4", 5", 7", 10"
- Max pressure: 8 bar (116 psi), 35°C (95°F)
- Max total hardness: 500 CaCO₃ (50°F)

Accessories on demand: spanner, wall brackets, brass and plastic nipples, Lubrikit.

非比例配量系统。

小巧型S,L和SL (3个端口) 设计有锅炉保护。款型配有多磷酸盐滤芯或松散晶体。

- 英制 (BSP) 和美制 (NPT) 螺纹。
- 输入/输出: 1/2", 3/4", 1"
- 高度: 5" M, 4", 5", 7", 10"
- 最大工作压力: 8巴 (116磅/平方英寸), 35摄氏度 (95华氏度)
- 最大总硬度: 500碳酸钙 (50华氏度)

需要的配件: 扳手, 墙装托架, 黄铜和塑料接头, Lubrikit (润滑剂组件)。

DOSAL

Non-proportional dosing system designed for the protection of washing machines. Easy and ready for the installation, no plumbing required. IN/OUT 3/4".

- Max pressure: 7 bar (101 psi), 35°C (95°F)
- Max total hardness: 500 CaCO₃ (50°F)

Accessory on demand: Lubrikit.

非比例配量系统为洗衣机保护而设计, 易于准备和安装, 无需水管装置。输入/输出: 3/4"。

- 最大压力: 7巴 (101磅/平方英寸), 35摄氏度 (95华氏度)
- 最大总硬度: 500碳酸钙 (50华氏度)

需要的配件: Lubrikit (润滑剂套件)。



SENIOR 3P MP HA



SENIOR 3P




JUNIOR 2P



MIGNON SL 3P HA



MIGNON S 2P

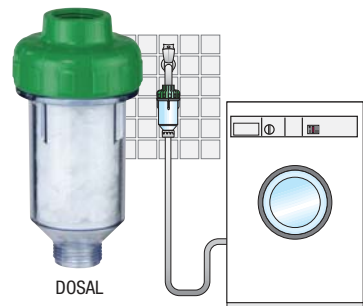

DOSAL



Polyphosphate crystals refill
0.5 kg and 1.5 kg pack

多磷酸盐晶体
每瓶0.5公斤和1.5公斤



HA polyphosphate cartridge refill
Heights 4", 5", 7", 10".

HA 多磷酸盐滤芯填充
高度4", 5", 7", 10"




Polyphosphate crystals refill
160 g blister

多磷酸盐晶体
每吸塑包160克

PROPORTIONAL ROTARY PUMP FOR LIQUID POLYPHOSPHATE

DOSAPUMP LP

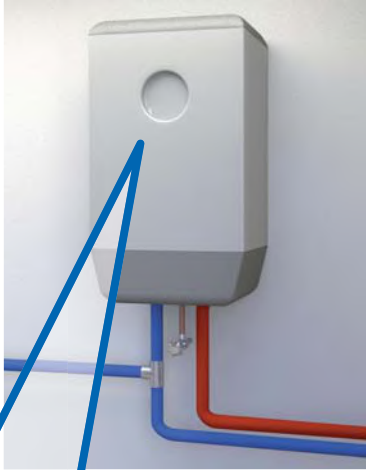

ANTI-SCALE | ANTI-CORROSION

Rotary gear pump for the proportional dosage of liquid polyphosphate. No power required.

The dosage is hydraulically self-primed by a rotary gear which by the means of water pressure only injects in water controlled amount of media. The dosage is precise and proportional to the flow rate. Patented.

Male IN/OUT rotational group connection for easy connection to horizontal and vertical pipes.

Polyphosphate tank can be installed remote from the pump body.

Polyphos LP is a proprietary food grade liquid polyphosphate, refill provided in 1 kg bottle.

Dosapump is designed for the anti-scale and anti-corrosion protection of boilers and water heaters.

防水垢 | 防腐蚀

旋转齿轮泵设计用于液态聚磷酸盐的比例配置系统。无需电源。

加量通过旋转齿轮自主液压来实现，通过水压在水中注入受控制的介质量。剂量是精确的，与流量成比例。取得专利。

输入/输出外螺纹旋转组件连接，便于连接水平和垂直管件。

聚磷酸盐罐可以远离泵体安装

Polyphos LP是一种专有的食品等级的液态聚磷酸盐，可通过1公斤的瓶填充。

Dosapump设计适用于锅炉和热水器的防垢和防腐蚀保护。



360°



POLIPHOS LP 0.25 Kg
refill included in the package
包装里配有再填充体



POLIPHOS LP 1 Kg
refill available on demand
根据需求配置的再填充体

DOSAPUMP LP

ATLAS FILTRI ENGINEERING

Atlas Filtri Engineering designs and provides full water treatment plants, customized in every detail upon specific requirements:

Data collection - Definition of the process to be adopted - Design implementation - Equipment assembly with technical running test - Equipment installation on site, start-up and personnel training.

ATLAS FILTRI工程公司根据具体要求专业设计和提供定制的整套水处理设备:

数据采集 - 确定采用的流程 - 设计实施 - 根据技术测试装配设备 - 设备现场安装, 启动和人员培训

SOFTENERS

JUPITER

A wide range of automatic softeners, for residential and industrial use.

Models with separated brine tank, single cabinet models, duplex models. Resin tanks from 5 to 1100 litres. Flow rates from 500 to 50000 l/h. Larger resin tanks/flow rates available on demand.

Available accessories: chlorination kits for resin disinfection, manual by-pass.

一系列自动软水机, 适合家用和工业用。

带有独立盐水柜的款式, 单舱款式, 双体款式。树脂罐容量5升至1100升。流量500至50000 l/h。按需求可以提供更大容量和更大流量的树脂罐。

可提供配件: 树脂杀菌的氯化消毒套件, 手动旁通阀。



PORTABLE SOFTENER

ADRIATIC 5

Manually operated portable softener. No electricity, no plumbing required.

Carbon-block pre-filtration cartridge and HS easy-brine regeneration cartridge.

5 litres resin tank, weight 10 kg, dimensions 250x370x445 mm.

Hobby: car wash, caravanning, yachting, gardening, etc.

Professional use: filling of heating systems, solar panels, glass wash.

手动操作便携式软水机。无需电源, 无需水管设施。

炭块预过滤滤芯和HS易于盐水再生滤芯。

5升树脂罐, 重量10公斤, 尺寸250x370x445毫米

业余爱好: 洗车, 休闲露营, 游艇, 园艺等

专业用途: 灌装加热系统, 太阳能电池板, 玻璃清洗。



MARS, SAND, VENUS, VEGA

MARS - Automatic iron-removers with Pyrolusite. Media tank from 25 to 700 litres. Flow rates from 750 to 10000 l/h. Larger media tanks/flow rates available on demand. **Available accessory:** manual by-pass.

VENUS - Automatic chlorine-removers with GAC, granular activated carbon. GAC tank from 25 to 600 litres. Flow rates from 700 to 16000 l/h. Larger media tanks/flow rates available on demand. **Available accessory:** manual by-pass.

SAND - Automatic sand-filters with quartzite beds with a gradient of varied granulometry. Quartzite tank from 25 to 500 litres. Flow rates from 700 to 14000 l/h. Larger media tanks/flow rates available on demand. **Available accessory:** manual by-pass.

VEGA - Automatic arsenic-removers with GFH (Granular Ferric Hydroxide). GFH tank from 40 to 360 litres. Flow rates from 400 to 3200 l/h. Larger media tanks/flow rates available on demand. **Available accessory:** manual by-pass.

MARS - 带软锰矿的自动除铁机。 媒质罐容量25升至700升。流速从750至10000 l/h。按需求可以提供更大容量和更大流量的媒质罐。可提供的配件：手动旁通阀。

VENUS - 带GAC颗粒活性炭的自动除铁机。 颗粒活性炭罐容量25升至600升。流速从700至16000 l/h。按需求可以提供更大容量和更大流量的媒质罐。可提供的配件：手动旁通阀。

SAND - 带不同粒度坡度石英岩床的自动过滤砂石机。 石英岩罐容量25升至500升。流速从750至14000 l/h。按需求可以提供更大容量和更大流量的媒质罐。

可提供的配件：手动旁通阀。

VEGA - 带GFH自动除砷机（氢氧化铁颗粒）。

氢氧化铁罐容量40升至360升。流速从400至3200 l/h。按需求可以提供更大容量和更大流量的媒质罐。

可提供的配件：手动旁通阀。



REVERSE OSMOSIS

Standard Reverse Osmosis Units from 40 l/h to 1000 l/h.

RO units and plants designed on specific demand up to 50000 l/h. Models applicable for brackish water. Single stage RO units and dual stage RO units for bi-desalination for use in several industrial sectors: pharmaceuticals, cosmetics, electronics, and all other use requiring ultra-pure water.

标准反渗透单元从40 升/小时至1000升/小时。

反渗透单元和厂房按特殊需求设计至50000 升/小时。款式适用于碱性水。

单级反渗透单元和双极反渗透单元适用于要求使用双次海水脱盐淡化的各工业领域：制药，化妆品，电子和所有其他要求使用超纯水的领域。



RO 050.DGT
Permeate production 50 l/h
渗透产量 50升/小时



RO 1000
Permeate production 1000 l/h
渗透产量 1000升/小时



ATLAS FILTRI is a registered trade mark of ATLAS FILTRI srl.
ATLAS FILTRI (雅德拉斯)是雅德拉斯过滤器有限公司的注册商标



DEPURAL is a registered trade mark of ATLAS FILTRI srl.
DEPURAL (德普拉尔)是雅德拉斯过滤器有限公司的注册商标



SANIC is a registered trade mark of ATLAS FILTRI srl.
SANIC(萨尼科)是雅德拉斯过滤器有限公司的注册商标

Unauthorized use of the registered trade marks is strictly forbidden and legally persecuted.
未经授权擅自使用注册商标需严格禁止并依法追究法律责任。



ATLAS FILTRI Far East Trading (Shanghai) Co., Ltd
288 Nanjing West Road - Chong Hing Finance Centre - Floor 12 - Shanghai 200003 CHINA
Tel. +86 21 6133 7811 - e-mail: atlasfiltrifareast@atlasfiltri.com

雅德拉斯贸易(上海)有限公司
中国上海市南京西路288号, 创兴金融中心12楼, 邮编200003
电话: +86 21 6133 7811 - 邮箱: atlasfiltrifareast@atlasfiltri.com

Images and texts are property of ATLAS FILTRI srl, which reserves the rights to change products design and specification without prior notice.
图像和文字的所有权属于ATLAS FILTRI Srl, 它保留在不事先通知情况下更改产品设计和规格的权利。

ATLAS FILTRI s.r.l.
Headquarter: via Pierobon, 32 - Production site: via del Santo, 227 - I-35010 Limena, Italy

www.atlasfiltri.com