



PLUS 3P

filter housings for cartridges BX and CX

Range of housings designed to fit to exclusive BX cartridges with 45 mm double o-ring collar and to exclusive CX cartridges with 57 mm double o-ring collar.

HOUSINGS PLUS 3P

FOR CARTRIDGES BX and CX

Housings PLUS 3P BX fit to exclusive BX cartridges with 45 mm double o-ring collar, available as single, DUPLEX and TRIPLEX models.

Housings PLUS 3P CX fit to exclusive CX cartridges with 57 mm double o-ring collar.

A very wide range of Atlas Filtri® BX and CX cartridges is available for 3P PLUS BX and CX housings and provide a complete range of water filtration and treatment units.

Housings PLUS S 3P BX and housings PLUS S 3P CX with discharge valve are provided with a drain funnel to protect potable water from pollution by back-flow, in compliance with **UNI EN 1717-11/2002**. S models can be used with KIT AUTO for automatic flushing and self-cleaning.



BX cartridges with 45 mm double o-ring collar. Quick-fit connection for a perfect tightening.



CX cartridges with 57 mm double o-ring collar. Quick-fit connection for a perfect tightening and designed to suit to large water flow.

PLUS 3P BX and PLUS 3P CX housings are suitable for every Point-of-Entry (POE) application, as single or multi-stage on-line filters.

CERTIFICATIONS




A range of housings is certified by IAPMO RT to NSF/ANSI 42, 61, 372 - lead free, CSA B483.1. In compliance with Drinking Water Treatment Units regulations, USA and Canada.



Housings are tested and certified under the most stringent procedures worldwide, in compliance with DM 25 (Italy), with the sanitary certification ACS (France), EAC/Ghostregistrazia (Russia) and WaterMark (Australia).

ACCESSORY INCLUDED

DISCHARGE KIT FOR -S- MODELS

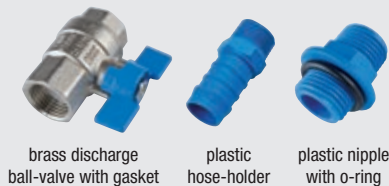

brass discharge ball-valve with gasket plastic hose-holder plastic nipple with o-ring



drain funnel

In compliance with the European Standard UNI EN 1717/2002: designed to prevent back-flow contamination by making all elements downstream the discharge vent to atmosphere (protection unit symbol: DC)

SYMBOLS LEGEND



For domestic use



For technical and industrial use



Filter housings made in PET, a highly recyclable plastic, are manufactured with a proprietary procedure saving up to 60% of energy in injection molding compared with standard plastics. That is one of Atlas Filtri commitments for the reduction of green house gas (CO₂) emissions in the atmosphere.

ACCESSORIES ON DEMAND



-U- spanner CODE RB7403013



-S- wall bracket CODE RB7400007



-D- wall bracket CODE RB7400009



-T- wall bracket CODE RB7401010



3/4" brass nipples with o-ring (pair) CODE RB7404001


1" brass nipples with o-ring (pair) CODE RB7404002



3/4" plastic nipple with o-ring CODE LB7404012



3/4"-1/4" plastic reduction with o-ring CODE LB9020611

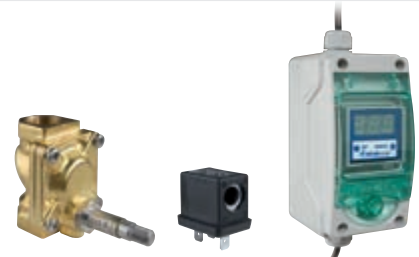

-KIT AUTO- for S models CODE RE7120024 automatic discharge kit (see pages 186-187)




-LUBRIKIT- single-dose lubricant for housing o-ring CODE RE9020650

HOUSINGS RANGE



| SENIOR | PLUS | 3P | A | FO | BX | TS |
|----------------|----------|----------|-------------------------|------------------------------------|------------------|----|
| HOUSINGS MODEL | VERSION | IN / OUT | THREADS TYPE | CARTRIDGE TYPE | BOWL TYPE | |
| MEDIUM DUPLEX | PLUS | M 1/2" | FO - BRASS BSP * | BX - QUICK-FIT DOUBLE O-RING 45 mm | TS - CLEAR (PET) | |
| JUNIOR DUPLEX | PLUS M | A 3/4" | FP - PLASTIC BSP * | CX - QUICK-FIT DOUBLE O-RING 57 mm | AB - BLUE (PET) | |
| SENIOR DUPLEX | PLUS S | B 1" | FP-NPT - PLASTIC NPT ** | | | |
| MASTER DUPLEX | PLUS S M | D 1 1/4" | MP - PLASTIC BSP * | | | |
| MEDIUM TRIPLEX | | E 1 1/2" | | | | |
| JUNIOR TRIPLEX | | F 2" | | | | |
| SENIOR TRIPLEX | | | | | | |
| MASTER TRIPLEX | | | | | | |






PLUS 3P BX

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.



PLUS 3P BX clear housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T121 | MEDIUM PLUS 3P MFO BX TS | 5" | 1/2" | 191 | 133 | 130 |
| RA107T421 | MEDIUM PLUS 3P AFO BX TS | 5" | 3/4" | 191 | 133 | 130 |
| RA107T721 | MEDIUM PLUS 3P BFO BX TS | 5" | 1" | 197 | 145 | 130 |
| RA109T121 | JUNIOR PLUS 3P MFO BX TS | 7" | 1/2" | 241 | 133 | 130 |
| RA109T421 | JUNIOR PLUS 3P AFO BX TS | 7" | 3/4" | 241 | 133 | 130 |
| RA109T721 | JUNIOR PLUS 3P BFO BX TS | 7" | 1" | 247 | 145 | 130 |
| RA111T121 | SENIOR PLUS 3P MFO BX TS | 10" | 1/2" | 315 | 133 | 130 |
| RA111T421 | SENIOR PLUS 3P AFO BX TS | 10" | 3/4" | 315 | 133 | 130 |
| RA111T721 | SENIOR PLUS 3P BFO BX TS | 10" | 1" | 321 | 145 | 130 |
| RA115T121 | MASTER PLUS 3P MFO BX TS | 20" | 1/2" | 571 | 133 | 130 |
| RA115T421 | MASTER PLUS 3P AFO BX TS | 20" | 3/4" | 571 | 133 | 130 |
| RA115T721 | MASTER PLUS 3P BFO BX TS | 20" | 1" | 577 | 145 | 130 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T221 | MEDIUM PLUS 3P MFP BX TS | 5" | 1/2" | 191 | 133 | 130 |
| RA107T521 | MEDIUM PLUS 3P AFP BX TS | 5" | 3/4" | 191 | 133 | 130 |
| RA107T821 | MEDIUM PLUS 3P BFP BX TS | 5" | 1" | 197 | 145 | 130 |
| RA109T221 | JUNIOR PLUS 3P MFP BX TS | 7" | 1/2" | 241 | 133 | 130 |
| RA109T521 | JUNIOR PLUS 3P AFP BX TS | 7" | 3/4" | 241 | 133 | 130 |
| RA109T821 | JUNIOR PLUS 3P BFP BX TS | 7" | 1" | 247 | 145 | 130 |
| RA111T221 | SENIOR PLUS 3P MFP BX TS | 10" | 1/2" | 315 | 133 | 130 |
| RA111T521 | SENIOR PLUS 3P AFP BX TS | 10" | 3/4" | 315 | 133 | 130 |
| RA111T821 | SENIOR PLUS 3P BFP BX TS | 10" | 1" | 321 | 145 | 130 |
| RA115T221 | MASTER PLUS 3P MFP BX TS | 20" | 1/2" | 571 | 133 | 130 |
| RA115T521 | MASTER PLUS 3P AFP BX TS | 20" | 3/4" | 571 | 133 | 130 |
| RA115T821 | MASTER PLUS 3P BFP BX TS | 20" | 1" | 577 | 145 | 130 |


HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T523 | MEDIUM PLUS 3P AFP NPT BX TS | 5" | 3/4" | 191 | 133 | 130 |
| RA107T823 | MEDIUM PLUS 3P BFP NPT BX TS | 5" | 1" | 197 | 145 | 130 |
| RA109T523 | JUNIOR PLUS 3P AFP NPT BX TS | 7" | 3/4" | 241 | 133 | 130 |
| RA109T823 | JUNIOR PLUS 3P BFP NPT BX TS | 7" | 1" | 247 | 145 | 130 |
| RA111T621 | SENIOR PLUS 3P AFP NPT BX TS | 10" | 3/4" | 315 | 133 | 130 |
| RA111T823 | SENIOR PLUS 3P BFP NPT BX TS | 10" | 1" | 321 | 145 | 130 |
| RA115T523 | MASTER PLUS 3P AFP NPT BX TS | 20" | 3/4" | 571 | 133 | 130 |
| RA115T823 | MASTER PLUS 3P BFP NPT BX TS | 20" | 1" | 577 | 145 | 130 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T225 | MEDIUM PLUS 3P MMP BX TS | 5" | 1/2" | 191 | 175 | 130 |
| RA107T525 | MEDIUM PLUS 3P AMP BX TS | 5" | 3/4" | 191 | 175 | 130 |
| RA107T825 | MEDIUM PLUS 3P BMP BX TS | 5" | 1" | 197 | 175 | 130 |
| RA109T225 | JUNIOR PLUS 3P MMP BX TS | 7" | 1/2" | 241 | 175 | 130 |
| RA109T525 | JUNIOR PLUS 3P AMP BX TS | 7" | 3/4" | 241 | 175 | 130 |
| RA109T825 | JUNIOR PLUS 3P BMP BX TS | 7" | 1" | 247 | 175 | 130 |
| RA111T225 | SENIOR PLUS 3P MMP BX TS | 10" | 1/2" | 315 | 175 | 130 |
| RA111T525 | SENIOR PLUS 3P AMP BX TS | 10" | 3/4" | 315 | 175 | 130 |
| RA111T825 | SENIOR PLUS 3P BMP BX TS | 10" | 1" | 321 | 175 | 130 |
| RA115T225 | MASTER PLUS 3P MMP BX TS | 20" | 1/2" | 571 | 175 | 130 |
| RA115T525 | MASTER PLUS 3P AMP BX TS | 20" | 3/4" | 571 | 175 | 130 |
| RA115T828 | MASTER PLUS 3P BMP BX TS | 20" | 1" | 577 | 175 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

PLUS 3P BX blue housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T122 | MEDIUM PLUS 3P MFO BX AB | 5" | 1/2" | 191 | 133 | 130 |
| RA107T422 | MEDIUM PLUS 3P AFO BX AB | 5" | 3/4" | 191 | 133 | 130 |
| RA107T722 | MEDIUM PLUS 3P BFO BX AB | 5" | 1" | 197 | 145 | 130 |
| RA109T122 | JUNIOR PLUS 3P MFO BX AB | 7" | 1/2" | 241 | 133 | 130 |
| RA109T422 | JUNIOR PLUS 3P AFO BX AB | 7" | 3/4" | 241 | 133 | 130 |
| RA109T722 | JUNIOR PLUS 3P BFO BX AB | 7" | 1" | 247 | 145 | 130 |
| RA111T122 | SENIOR PLUS 3P MFO BX AB | 10" | 1/2" | 315 | 133 | 130 |
| RA111T422 | SENIOR PLUS 3P AFO BX AB | 10" | 3/4" | 315 | 133 | 130 |
| RA111T722 | SENIOR PLUS 3P BFO BX AB | 10" | 1" | 321 | 145 | 130 |
| RA115T122 | MASTER PLUS 3P MFO BX AB | 20" | 1/2" | 571 | 133 | 130 |
| RA115T422 | MASTER PLUS 3P AFO BX AB | 20" | 3/4" | 571 | 133 | 130 |
| RA115T722 | MASTER PLUS 3P BFO BX AB | 20" | 1" | 577 | 145 | 130 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T222 | MEDIUM PLUS 3P MFP BX AB | 5" | 1/2" | 191 | 133 | 130 |
| RA107T522 | MEDIUM PLUS 3P AFP BX AB | 5" | 3/4" | 191 | 133 | 130 |
| RA107T822 | MEDIUM PLUS 3P BFP BX AB | 5" | 1" | 197 | 145 | 130 |
| RA109T222 | JUNIOR PLUS 3P MFP BX AB | 7" | 1/2" | 241 | 133 | 130 |
| RA109T522 | JUNIOR PLUS 3P AFP BX AB | 7" | 3/4" | 241 | 133 | 130 |
| RA109T822 | JUNIOR PLUS 3P BFP BX AB | 7" | 1" | 247 | 145 | 130 |
| RA111T222 | SENIOR PLUS 3P MFP BX AB | 10" | 1/2" | 315 | 133 | 130 |
| RA111T522 | SENIOR PLUS 3P AFP BX AB | 10" | 3/4" | 315 | 133 | 130 |
| RA111T822 | SENIOR PLUS 3P BFP BX AB | 10" | 1" | 321 | 145 | 130 |
| RA115T222 | MASTER PLUS 3P MFP BX AB | 20" | 1/2" | 571 | 133 | 130 |
| RA115T522 | MASTER PLUS 3P AFP BX AB | 20" | 3/4" | 571 | 133 | 130 |
| RA115T822 | MASTER PLUS 3P BFP BX AB | 20" | 1" | 577 | 145 | 130 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T524 | MEDIUM PLUS 3P AFP NPT BX AB | 5" | 3/4" | 191 | 133 | 130 |
| RA107T824 | MEDIUM PLUS 3P BFP NPT BX AB | 5" | 1" | 197 | 145 | 130 |
| RA109T524 | JUNIOR PLUS 3P AFP NPT BX AB | 7" | 3/4" | 241 | 133 | 130 |
| RA109T824 | JUNIOR PLUS 3P BFP NPT BX AB | 7" | 1" | 247 | 145 | 130 |
| RA111T622 | SENIOR PLUS 3P AFP NPT BX AB | 10" | 3/4" | 315 | 133 | 130 |
| RA111T824 | SENIOR PLUS 3P BFP NPT BX AB | 10" | 1" | 321 | 145 | 130 |
| RA115T622 | MASTER PLUS 3P AFP NPT BX AB | 20" | 3/4" | 571 | 133 | 130 |
| RA115T824 | MASTER PLUS 3P BFP NPT BX AB | 20" | 1" | 577 | 145 | 130 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T226 | MEDIUM PLUS 3P MMP BX AB | 5" | 1/2" | 191 | 175 | 130 |
| RA107T526 | MEDIUM PLUS 3P AMP BX AB | 5" | 3/4" | 191 | 175 | 130 |
| RA107T826 | MEDIUM PLUS 3P BMP BX AB | 5" | 1" | 197 | 175 | 130 |
| RA109T226 | JUNIOR PLUS 3P MMP BX AB | 7" | 1/2" | 241 | 175 | 130 |
| RA109T526 | JUNIOR PLUS 3P AMP BX AB | 7" | 3/4" | 241 | 175 | 130 |
| RA109T826 | JUNIOR PLUS 3P BMP BX AB | 7" | 1" | 247 | 175 | 130 |
| RA111T226 | SENIOR PLUS 3P MMP BX AB | 10" | 1/2" | 315 | 175 | 130 |
| RA111T526 | SENIOR PLUS 3P AMP BX AB | 10" | 3/4" | 315 | 175 | 130 |
| RA111T828 | SENIOR PLUS 3P BMP BX AB | 10" | 1" | 321 | 175 | 130 |
| RA115T226 | MASTER PLUS 3P MMP BX AB | 20" | 1/2" | 571 | 175 | 130 |
| RA115T526 | MASTER PLUS 3P AMP BX AB | 20" | 3/4" | 571 | 175 | 130 |
| RA115T829 | MASTER PLUS 3P BMP BX AB | 20" | 1" | 577 | 175 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.




PLUS M 3P BX

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.
 Manometers: radial type, pressure range 0-12 bar, 0-170 psi.



PLUS M 3P BX clear housings with 2 manometers

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T124 | MEDIUM PLUS M 3P MFO BX TS | 5" | 1/2" | 241 | 133 | 130 |
| RA107T424 | MEDIUM PLUS M 3P AFO BX TS | 5" | 3/4" | 241 | 133 | 130 |
| RA107T724 | MEDIUM PLUS M 3P BFO BX TS | 5" | 1" | 247 | 145 | 130 |
| RA109T124 | JUNIOR PLUS M 3P MFO BX TS | 7" | 1/2" | 291 | 133 | 130 |
| RA109T424 | JUNIOR PLUS M 3P AFO BX TS | 7" | 3/4" | 291 | 133 | 130 |
| RA109T724 | JUNIOR PLUS M 3P BFO BX TS | 7" | 1" | 297 | 145 | 130 |
| RA111T124 | SENIOR PLUS M 3P MFO BX TS | 10" | 1/2" | 365 | 133 | 130 |
| RA111T424 | SENIOR PLUS M 3P AFO BX TS | 10" | 3/4" | 365 | 133 | 130 |
| RA111T724 | SENIOR PLUS M 3P BFO BX TS | 10" | 1" | 371 | 145 | 130 |
| RA115T124 | MASTER PLUS M 3P MFO BX TS | 20" | 1/2" | 621 | 133 | 130 |
| RA115T424 | MASTER PLUS M 3P AFO BX TS | 20" | 3/4" | 621 | 133 | 130 |
| RA115T724 | MASTER PLUS M 3P BFO BX TS | 20" | 1" | 627 | 145 | 130 |


HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T428 | MEDIUM PLUS M 3P AFP BX TS | 5" | 3/4" | 241 | 133 | 130 |
| RA107T728 | MEDIUM PLUS M 3P BFP BX TS | 5" | 1" | 247 | 145 | 130 |
| RA109T428 | JUNIOR PLUS M 3P AFP BX TS | 7" | 3/4" | 291 | 133 | 130 |
| RA109T728 | JUNIOR PLUS M 3P BFP BX TS | 7" | 1" | 297 | 145 | 130 |
| RA111T423 | SENIOR PLUS M 3P AFP BX TS | 10" | 3/4" | 365 | 133 | 130 |
| RA111T728 | SENIOR PLUS M 3P BFP BX TS | 10" | 1" | 371 | 145 | 130 |
| RA115T423 | MASTER PLUS M 3P AFP BX TS | 20" | 3/4" | 621 | 133 | 130 |
| RA115T728 | MASTER PLUS M 3P BFP BX TS | 20" | 1" | 627 | 145 | 130 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T426 | MEDIUM PLUS M 3P AFP NPT BX TS | 5" | 3/4" | 241 | 133 | 130 |
| RA107T726 | MEDIUM PLUS M 3P BFP NPT BX TS | 5" | 1" | 247 | 145 | 130 |
| RA109T426 | JUNIOR PLUS M 3P AFP NPT BX TS | 7" | 3/4" | 291 | 133 | 130 |
| RA109T726 | JUNIOR PLUS M 3P BFP NPT BX TS | 7" | 1" | 297 | 145 | 130 |
| RA111T426 | SENIOR PLUS M 3P AFP NPT BX TS | 10" | 3/4" | 365 | 133 | 130 |
| RA111T826 | SENIOR PLUS M 3P BFP NPT BX TS | 10" | 1" | 371 | 145 | 130 |
| RA115T426 | MASTER PLUS M 3P AFP NPT BX TS | 20" | 3/4" | 621 | 133 | 130 |
| RA115T826 | MASTER PLUS M 3P BFP NPT BX TS | 20" | 1" | 627 | 145 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.
 Manometers: radial type, pressure range 0-12 bar, 0-170 psi.

PLUS M 3P BX blue housings with 2 manometers

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T125 | MEDIUM PLUS M 3P MFO BX AB | 5" | 1/2" | 241 | 133 | 130 |
| RA107T425 | MEDIUM PLUS M 3P AFO BX AB | 5" | 3/4" | 241 | 133 | 130 |
| RA107T725 | MEDIUM PLUS M 3P BFO BX AB | 5" | 1" | 247 | 145 | 130 |
| RA109T125 | JUNIOR PLUS M 3P MFO BX AB | 7" | 1/2" | 291 | 133 | 130 |
| RA109T425 | JUNIOR PLUS M 3P AFO BX AB | 7" | 3/4" | 291 | 133 | 130 |
| RA109T725 | JUNIOR PLUS M 3P BFO BX AB | 7" | 1" | 297 | 145 | 130 |
| RA111T125 | SENIOR PLUS M 3P MFO BX AB | 10" | 1/2" | 365 | 133 | 130 |
| RA111T425 | SENIOR PLUS M 3P AFO BX AB | 10" | 3/4" | 365 | 133 | 130 |
| RA111T725 | SENIOR PLUS M 3P BFO BX AB | 10" | 1" | 371 | 145 | 130 |
| RA115T125 | MASTER PLUS M 3P MFO BX AB | 20" | 1/2" | 621 | 133 | 130 |
| RA115T425 | MASTER PLUS M 3P AFO BX AB | 20" | 3/4" | 621 | 133 | 130 |
| RA115T825 | MASTER PLUS M 3P BFO BX AB | 20" | 1" | 627 | 145 | 130 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T429 | MEDIUM PLUS M 3P AFP BX AB | 5" | 3/4" | 241 | 133 | 130 |
| RA107T729 | MEDIUM PLUS M 3P BFP BX AB | 5" | 1" | 247 | 145 | 130 |
| RA109T429 | JUNIOR PLUS M 3P AFP BX AB | 7" | 3/4" | 291 | 133 | 130 |
| RA109T729 | JUNIOR PLUS M 3P BFP BX AB | 7" | 1" | 297 | 145 | 130 |
| RA111T429 | SENIOR PLUS M 3P AFP BX AB | 10" | 3/4" | 365 | 133 | 130 |
| RA111T729 | SENIOR PLUS M 3P BFP BX AB | 10" | 1" | 371 | 145 | 130 |
| RA115T429 | MASTER PLUS M 3P AFP BX AB | 20" | 3/4" | 621 | 133 | 130 |
| RA115T729 | MASTER PLUS M 3P BFP BX AB | 20" | 1" | 627 | 145 | 130 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA107T427 | MEDIUM PLUS M 3P AFP NPT BX AB | 5" | 3/4" | 241 | 133 | 130 |
| RA107T727 | MEDIUM PLUS M 3P BFP NPT BX AB | 5" | 1" | 247 | 145 | 130 |
| RA109T427 | JUNIOR PLUS M 3P AFP NPT BX AB | 7" | 3/4" | 291 | 133 | 130 |
| RA109T727 | JUNIOR PLUS M 3P BFP NPT BX AB | 7" | 1" | 297 | 145 | 130 |
| RA111T427 | SENIOR PLUS M 3P AFP NPT BX AB | 10" | 3/4" | 365 | 133 | 130 |
| RA111T727 | SENIOR PLUS M 3P BFP NPT BX AB | 10" | 1" | 371 | 145 | 130 |
| RA115T427 | MASTER PLUS M 3P AFP NPT BX AB | 20" | 3/4" | 621 | 133 | 130 |
| RA115T827 | MASTER PLUS M 3P BFP NPT BX AB | 20" | 1" | 627 | 145 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.




PLUS S 3P BX

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.
 Discharge ball-valve: CW 617 N brass nickel plated.
 Discharge plastic nipple: reinforced polypropylene.
 Drain funnel: reinforced polypropylene.

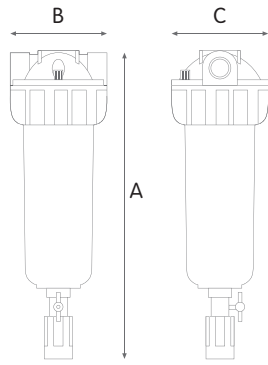

DRAIN FUNNEL
 Back-flow preventing device
 UNI EN 1717-11/2002

PLUS S 3P BX clear housings with discharge valve

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA111T123 | SENIOR PLUS S 3P MFO BX TS | 10" | 1/2" | 450 | 133 | 130 |
| RA111T428 | SENIOR PLUS S 3P AFO BX TS | 10" | 3/4" | 450 | 133 | 130 |
| RA111T726 | SENIOR PLUS S 3P BFO BX TS | 10" | 1" | 460 | 145 | 130 |
| RA115T123 | MASTER PLUS S 3P MFO BX TS | 20" | 1/2" | 710 | 133 | 130 |
| RA115T428 | MASTER PLUS S 3P AFO BX TS | 20" | 3/4" | 710 | 133 | 130 |
| RA115T725 | MASTER PLUS S 3P BFO BX TS | 20" | 1" | 720 | 145 | 130 |



HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA111T127 | SENIOR PLUS S 3P MFP BX TS | 10" | 1/2" | 450 | 133 | 130 |
| RA111T527 | SENIOR PLUS S 3P AFP BX TS | 10" | 3/4" | 450 | 133 | 130 |
| RA111T827 | SENIOR PLUS S 3P BFP BX TS | 10" | 1" | 460 | 145 | 130 |
| RA115T127 | MASTER PLUS S 3P MFP BX TS | 20" | 1/2" | 710 | 133 | 130 |
| RA115T527 | MASTER PLUS S 3P AFP BX TS | 20" | 3/4" | 710 | 133 | 130 |
| RA115T727 | MASTER PLUS S 3P BFP BX TS | 20" | 1" | 720 | 145 | 130 |



HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA111T433 | SENIOR PLUS S 3P AFP NPT BX TS | 10" | 3/4" | 450 | 133 | 130 |
| RA111T733 | SENIOR PLUS S 3P BFP NPT BX TS | 10" | 1" | 460 | 145 | 130 |
| RA115T433 | MASTER PLUS S 3P AFP NPT BX TS | 20" | 3/4" | 710 | 133 | 130 |
| RA115T733 | MASTER PLUS S 3P BFP NPT BX TS | 20" | 1" | 720 | 145 | 130 |



HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA111T130 | SENIOR PLUS S 3P MMP BX TS | 10" | 1/2" | 450 | 175 | 130 |
| RA111T430 | SENIOR PLUS S 3P AMP BX TS | 10" | 3/4" | 450 | 175 | 130 |
| RA111T730 | SENIOR PLUS S 3P BMP BX TS | 10" | 1" | 460 | 175 | 130 |
| RA115T130 | MASTER PLUS S 3P MMP BX TS | 20" | 1/2" | 710 | 175 | 130 |
| RA115T430 | MASTER PLUS S 3P AMP BX TS | 20" | 3/4" | 710 | 175 | 130 |
| RA115T730 | MASTER PLUS S 3P BMP BX TS | 20" | 1" | 720 | 175 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.




PLUS S M 3P BX

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT threads: CW 617 N brass inserts.
 Manometers: radial type, pressure range 0-12 bar, 0-170 psi.
 Discharge ball-valve: CW 617 N brass nickel plated.
 Discharge plastic nipple: reinforced polypropylene.
 Drain funnel: reinforced polypropylene.

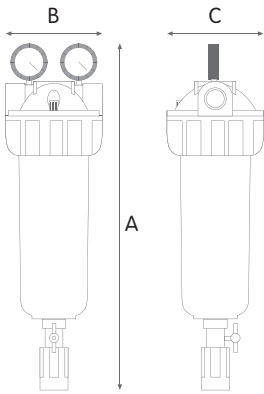

DRAIN FUNNEL
 Back-flow preventing device
 UNI EN 1717-11/2002

PLUS S M 3P BX clear housings with discharge valve and 2 manometers

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA111T134 | SENIOR PLUS S M 3P MFO BX TS | 10" | 1/2" | 500 | 133 | 130 |
| RA111T434 | SENIOR PLUS S M 3P AFO BX TS | 10" | 3/4" | 500 | 133 | 130 |
| RA111T734 | SENIOR PLUS S M 3P BFO BX TS | 10" | 1" | 510 | 145 | 130 |
| RA115T134 | MASTER PLUS S M 3P MFO BX TS | 20" | 1/2" | 760 | 133 | 130 |
| RA115T434 | MASTER PLUS S M 3P AFO BX TS | 20" | 3/4" | 760 | 133 | 130 |
| RA115T734 | MASTER PLUS S M 3P BFO BX TS | 20" | 1" | 770 | 145 | 130 |



HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA111T437 | SENIOR PLUS S M 3P AFP BX TS | 10" | 3/4" | 500 | 133 | 130 |
| RA111T737 | SENIOR PLUS S M 3P BFP BX TS | 10" | 1" | 510 | 145 | 130 |
| RA115T437 | MASTER PLUS S M 3P AFP BX TS | 20" | 3/4" | 760 | 133 | 130 |
| RA115T737 | MASTER PLUS S M 3P BFP BX TS | 20" | 1" | 770 | 145 | 130 |




HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA111T135 | SENIOR PLUS S M 3P AFP NPT BX TS | 10" | 3/4" | 500 | 133 | 130 |
| RA111T435 | SENIOR PLUS S M 3P BFP NPT BX TS | 10" | 1" | 510 | 145 | 130 |
| RA115T435 | MASTER PLUS S M 3P AFP NPT BX TS | 20" | 3/4" | 760 | 133 | 130 |
| RA115T735 | MASTER PLUS S M 3P BFP NPT BX TS | 20" | 1" | 770 | 145 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



DUPLEX PLUS 3P BX

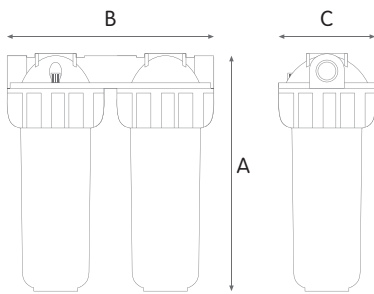

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DUPLEX PLUS 3P BX clear housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T421 | MEDIUM DUPLEX PLUS 3P AFO BX TS | 5" | 3/4" | 191 | 275 | 130 |
| RA108T721 | MEDIUM DUPLEX PLUS 3P BFO BX TS | 5" | 1" | 191 | 275 | 130 |
| RA110T421 | JUNIOR DUPLEX PLUS 3P AFO BX TS | 7" | 3/4" | 241 | 275 | 130 |
| RA110T721 | JUNIOR DUPLEX PLUS 3P BFO BX TS | 7" | 1" | 241 | 275 | 130 |
| RA112T421 | SENIOR DUPLEX PLUS 3P AFO BX TS | 10" | 3/4" | 315 | 275 | 130 |
| RA112T721 | SENIOR DUPLEX PLUS 3P BFO BX TS | 10" | 1" | 315 | 275 | 130 |
| RA116T421 | MASTER DUPLEX PLUS 3P AFO BX TS | 20" | 3/4" | 571 | 275 | 130 |
| RA116T721 | MASTER DUPLEX PLUS 3P BFO BX TS | 20" | 1" | 571 | 275 | 130 |


HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T521 | MEDIUM DUPLEX PLUS 3P AFP BX TS | 5" | 3/4" | 191 | 275 | 130 |
| RA110T521 | JUNIOR DUPLEX PLUS 3P AFP BX TS | 7" | 3/4" | 241 | 275 | 130 |
| RA112T521 | SENIOR DUPLEX PLUS 3P AFP BX TS | 10" | 3/4" | 315 | 275 | 130 |
| RA116T521 | MASTER DUPLEX PLUS 3P AFP BX TS | 20" | 3/4" | 571 | 275 | 130 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-------------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T424 | MEDIUM DUPLEX PLUS 3P AFP NPT BX TS | 5" | 3/4" | 191 | 275 | 130 |
| RA110T424 | JUNIOR DUPLEX PLUS 3P AFP NPT BX TS | 7" | 3/4" | 241 | 275 | 130 |
| RA112T621 | SENIOR DUPLEX PLUS 3P AFP NPT BX TS | 10" | 3/4" | 315 | 275 | 130 |
| RA116T424 | MASTER DUPLEX PLUS 3P AFP NPT BX TS | 20" | 3/4" | 571 | 275 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.

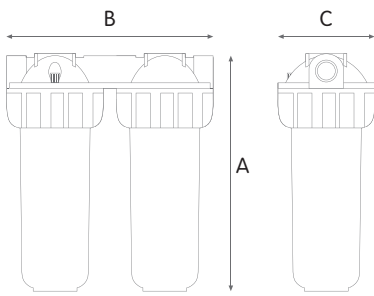

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DUPLEX PLUS 3P BX blue housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T422 | MEDIUM DUPLEX PLUS 3P AFO BX AB | 5" | 3/4" | 191 | 275 | 130 |
| RA108T722 | MEDIUM DUPLEX PLUS 3P BFO BX AB | 5" | 1" | 191 | 275 | 130 |
| RA110T422 | JUNIOR DUPLEX PLUS 3P AFO BX AB | 7" | 3/4" | 241 | 275 | 130 |
| RA110T722 | JUNIOR DUPLEX PLUS 3P BFO BX AB | 7" | 1" | 241 | 275 | 130 |
| RA112T422 | SENIOR DUPLEX PLUS 3P AFO BX AB | 10" | 3/4" | 315 | 275 | 130 |
| RA112T722 | SENIOR DUPLEX PLUS 3P BFO BX AB | 10" | 1" | 315 | 275 | 130 |
| RA116T422 | MASTER DUPLEX PLUS 3P AFO BX AB | 20" | 3/4" | 571 | 275 | 130 |
| RA116T722 | MASTER DUPLEX PLUS 3P BFO BX AB | 20" | 1" | 571 | 275 | 130 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T522 | MEDIUM DUPLEX PLUS 3P AFP BX AB | 5" | 3/4" | 191 | 275 | 130 |
| RA110T522 | JUNIOR DUPLEX PLUS 3P AFP BX AB | 7" | 3/4" | 241 | 275 | 130 |
| RA112T522 | SENIOR DUPLEX PLUS 3P AFP BX AB | 10" | 3/4" | 315 | 275 | 130 |
| RA116T522 | MASTER DUPLEX PLUS 3P AFP BX AB | 20" | 3/4" | 571 | 275 | 130 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-------------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T426 | MEDIUM DUPLEX PLUS 3P AFP NPT BX AB | 5" | 3/4" | 191 | 275 | 130 |
| RA110T426 | JUNIOR DUPLEX PLUS 3P AFP NPT BX AB | 7" | 3/4" | 241 | 275 | 130 |
| RA112T622 | SENIOR DUPLEX PLUS 3P AFP NPT BX AB | 10" | 3/4" | 315 | 275 | 130 |
| RA116T622 | MASTER DUPLEX PLUS 3P AFP NPT BX AB | 20" | 3/4" | 571 | 275 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.




TRIPLEX PLUS 3P BX

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

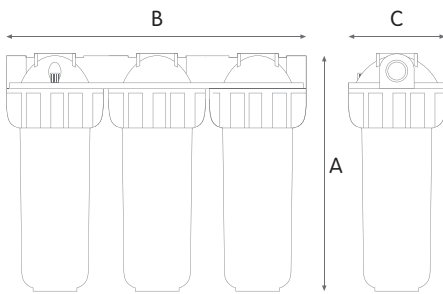

TRIPLEX PLUS 3P BX clear housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T441 | MEDIUM TRIPLEX PLUS 3P AFO BX TS | 5" | 3/4" | 191 | 420 | 130 |
| RA108T741 | MEDIUM TRIPLEX PLUS 3P BFO BX TS | 5" | 1" | 191 | 420 | 130 |
| RA110T441 | JUNIOR TRIPLEX PLUS 3P AFO BX TS | 7" | 3/4" | 241 | 420 | 130 |
| RA110T741 | JUNIOR TRIPLEX PLUS 3P BFO BX TS | 7" | 1" | 241 | 420 | 130 |
| RA112T441 | SENIOR TRIPLEX PLUS 3P AFO BX TS | 10" | 3/4" | 315 | 420 | 130 |
| RA112T741 | SENIOR TRIPLEX PLUS 3P BFO BX TS | 10" | 1" | 315 | 420 | 130 |
| RA116T441 | MASTER TRIPLEX PLUS 3P AFO BX TS | 20" | 3/4" | 571 | 420 | 130 |
| RA116T741 | MASTER TRIPLEX PLUS 3P BFO BX TS | 20" | 1" | 571 | 420 | 130 |


HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T541 | MEDIUM TRIPLEX PLUS 3P AFP BX TS | 5" | 3/4" | 191 | 420 | 130 |
| RA108T841 | MEDIUM TRIPLEX PLUS 3P BFP BX TS | 5" | 1" | 191 | 420 | 130 |
| RA110T541 | JUNIOR TRIPLEX PLUS 3P AFP BX TS | 7" | 3/4" | 241 | 420 | 130 |
| RA110T841 | JUNIOR TRIPLEX PLUS 3P BFP BX TS | 7" | 1" | 241 | 420 | 130 |
| RA112T541 | SENIOR TRIPLEX PLUS 3P AFP BX TS | 10" | 3/4" | 315 | 420 | 130 |
| RA112T841 | SENIOR TRIPLEX PLUS 3P BFP BX TS | 10" | 1" | 315 | 420 | 130 |
| RA116T541 | MASTER TRIPLEX PLUS 3P AFP BX TS | 20" | 3/4" | 571 | 420 | 130 |
| RA116T841 | MASTER TRIPLEX PLUS 3P BFP BX TS | 20" | 1" | 571 | 420 | 130 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T444 | MEDIUM TRIPLEX PLUS 3P AFP NPT BX TS | 5" | 3/4" | 191 | 420 | 130 |
| RA110T444 | JUNIOR TRIPLEX PLUS 3P AFP NPT BX TS | 7" | 3/4" | 241 | 420 | 130 |
| RA112T444 | SENIOR TRIPLEX PLUS 3P AFP NPT BX TS | 10" | 3/4" | 315 | 420 | 130 |
| RA116T444 | MASTER TRIPLEX PLUS 3P AFP NPT BX TS | 20" | 3/4" | 571 | 420 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.

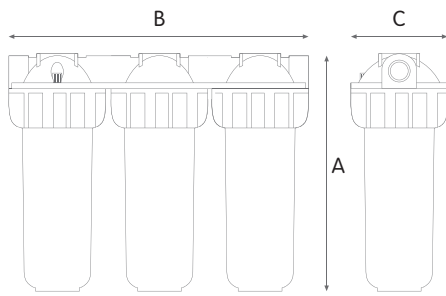

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

TRIPLEX PLUS 3P BX blue housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T442 | MEDIUM TRIPLEX PLUS 3P AFO BX AB | 5" | 3/4" | 191 | 420 | 130 |
| RA108T742 | MEDIUM TRIPLEX PLUS 3P BFO BX AB | 5" | 1" | 191 | 420 | 130 |
| RA110T442 | JUNIOR TRIPLEX PLUS 3P AFO BX AB | 7" | 3/4" | 241 | 420 | 130 |
| RA110T742 | JUNIOR TRIPLEX PLUS 3P BFO BX AB | 7" | 1" | 241 | 420 | 130 |
| RA112T442 | SENIOR TRIPLEX PLUS 3P AFO BX AB | 10" | 3/4" | 315 | 420 | 130 |
| RA112T742 | SENIOR TRIPLEX PLUS 3P BFO BX AB | 10" | 1" | 315 | 420 | 130 |
| RA116T442 | MASTER TRIPLEX PLUS 3P AFO BX AB | 20" | 3/4" | 571 | 420 | 130 |
| RA116T742 | MASTER TRIPLEX PLUS 3P BFO BX AB | 20" | 1" | 571 | 420 | 130 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T542 | MEDIUM TRIPLEX PLUS 3P AFP BX AB | 5" | 3/4" | 191 | 420 | 130 |
| RA108T842 | MEDIUM TRIPLEX PLUS 3P BFP BX AB | 5" | 1" | 191 | 420 | 130 |
| RA110T542 | JUNIOR TRIPLEX PLUS 3P AFP BX AB | 7" | 3/4" | 241 | 420 | 130 |
| RA110T842 | JUNIOR TRIPLEX PLUS 3P BFP BX AB | 7" | 1" | 241 | 420 | 130 |
| RA112T542 | SENIOR TRIPLEX PLUS 3P AFP BX AB | 10" | 3/4" | 315 | 420 | 130 |
| RA112T842 | SENIOR TRIPLEX PLUS 3P BFP BX AB | 10" | 1" | 315 | 420 | 130 |
| RA116T542 | MASTER TRIPLEX PLUS 3P AFP BX AB | 20" | 3/4" | 571 | 420 | 130 |
| RA116T842 | MASTER TRIPLEX PLUS 3P BFP BX AB | 20" | 1" | 571 | 420 | 130 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA108T446 | MEDIUM TRIPLEX PLUS 3P AFP NPT BX AB | 5" | 3/4" | 191 | 420 | 130 |
| RA110T446 | JUNIOR TRIPLEX PLUS 3P AFP NPT BX AB | 7" | 3/4" | 241 | 420 | 130 |
| RA112T446 | SENIOR TRIPLEX PLUS 3P AFP NPT BX AB | 10" | 3/4" | 315 | 420 | 130 |
| RA116T446 | MASTER TRIPLEX PLUS 3P AFP NPT BX AB | 20" | 3/4" | 571 | 420 | 130 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.